




Specifications for Appliance Flare Room Definer 45H

Factor	NG	LPG
Burner Type	80	80
Orifice	1000	260
BTU Max.	36800	26300
BTU min.	22000	17750
Kw/h	10.8k	7.7k
Chimney DIA.	5x8	5x8
Manifold Pressure[w.c]	4.7	10.4
Efficiency rate	78	82
Glass Size Length\Width	1030 X 620 mm	40" 9/16 X 24" 7/16'
Appliance Weigh	130Kg	286lb



Appliance Location

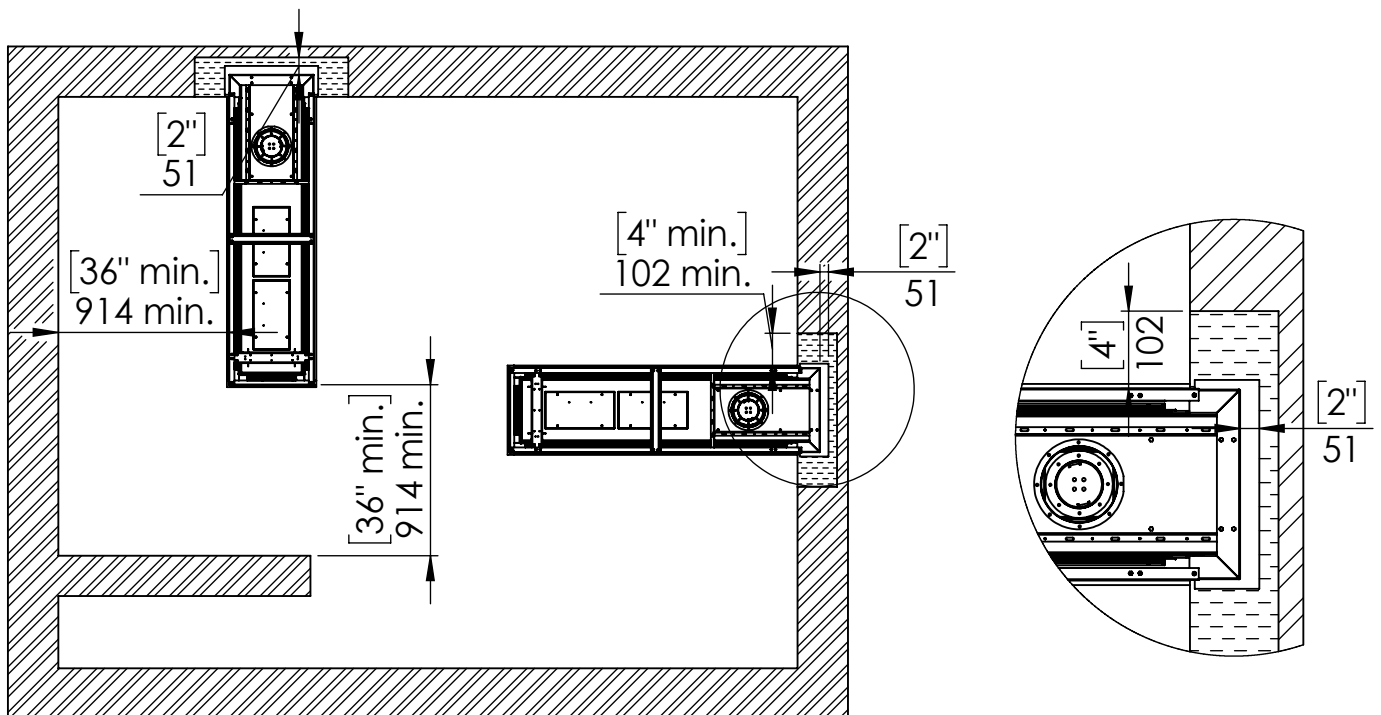

 Combustible Materials
 Non Combustible Materials




Flare Room Definer 45H

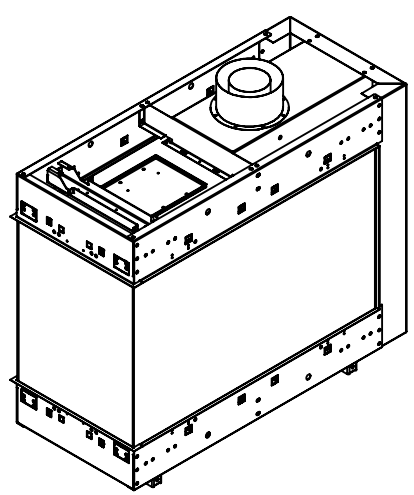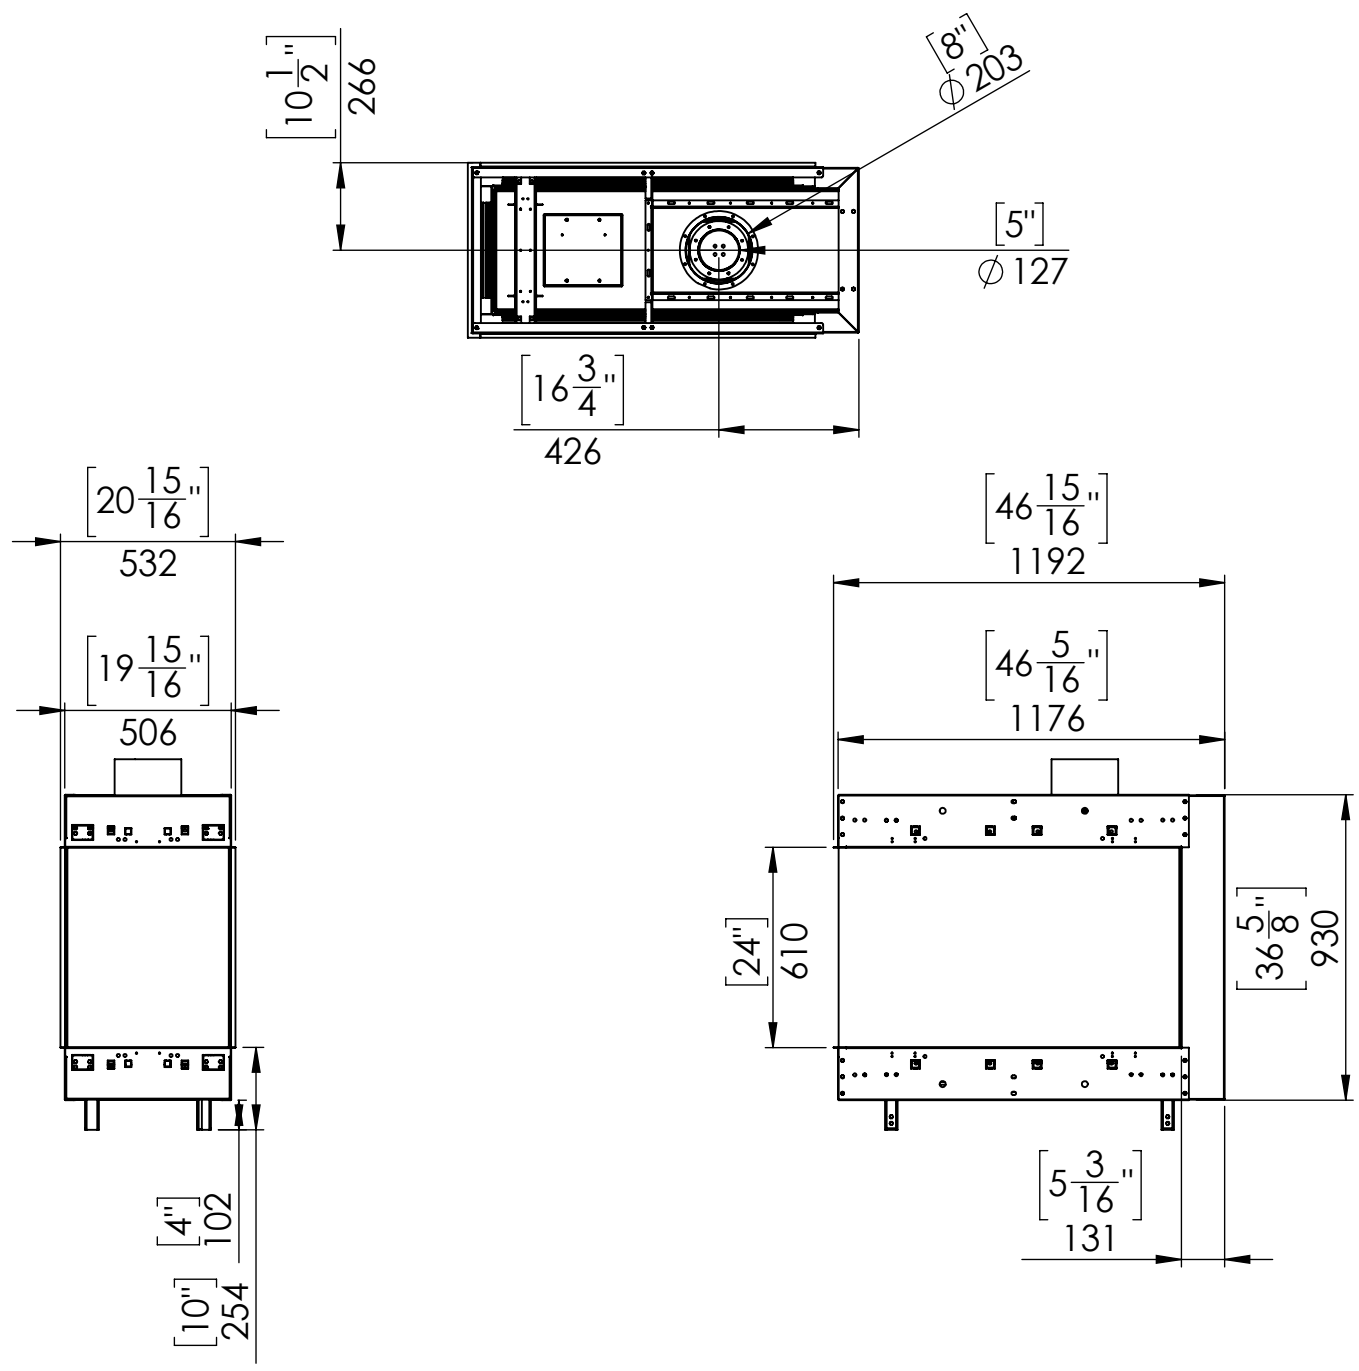


Telescopic leg ranges (from bottom of the glass): 10"-21"


Flat Installation

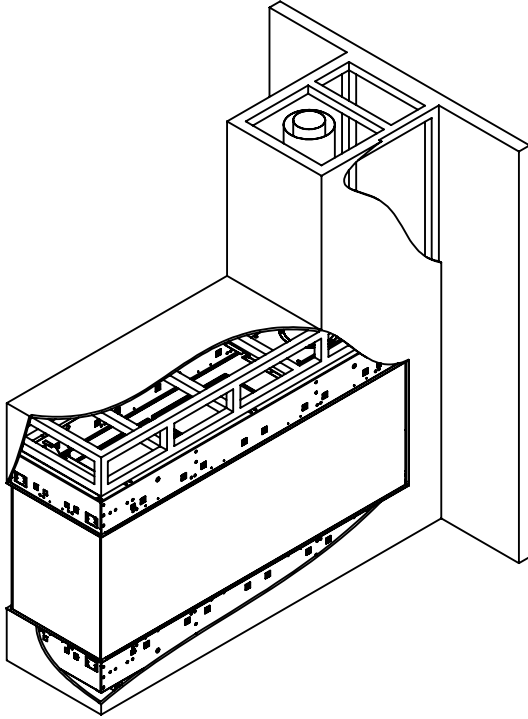


Step 1 - Basic Framing :

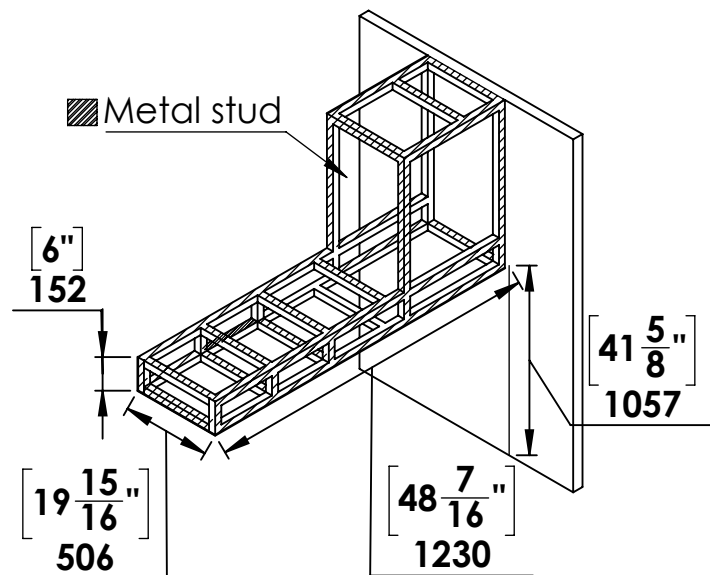

Recess Installation


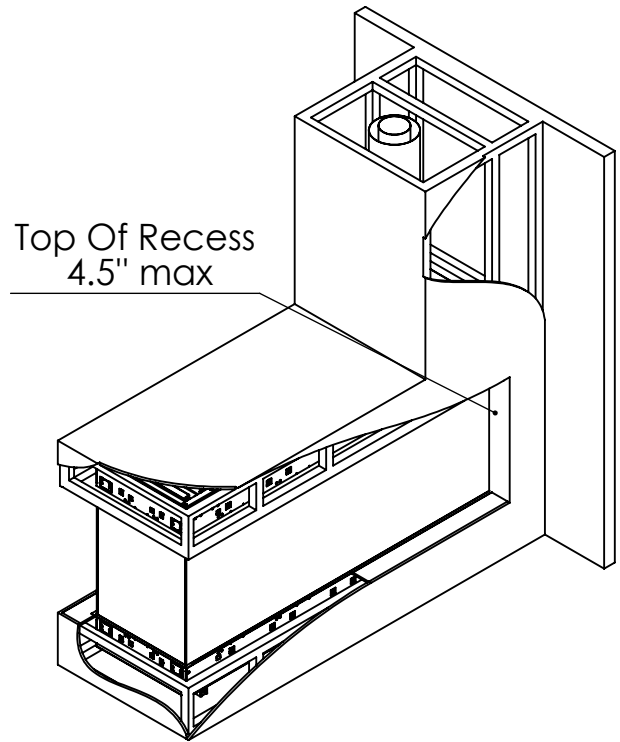


Step 1 - Basic Framing :

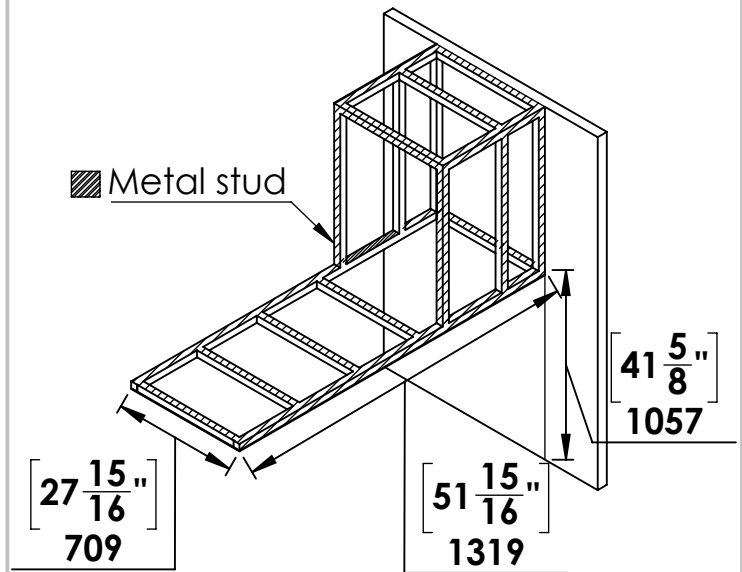


Flat Installation

Step 2 -Positioning the Fireplace:


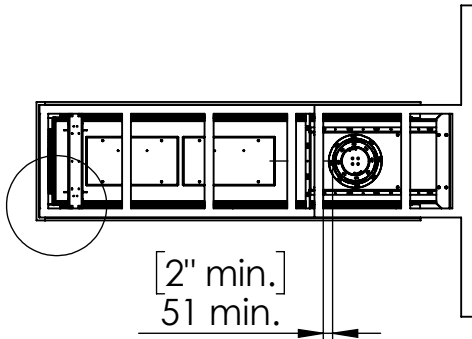


Fireplace frame finishing holder space to match wall finishing thickness

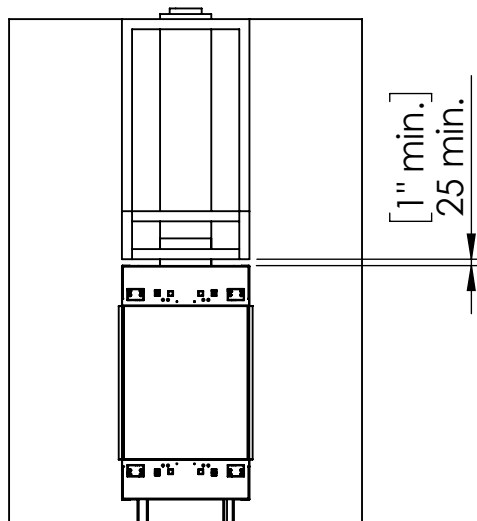



Recess Installation

Step 2 -Positioning the Fireplace:

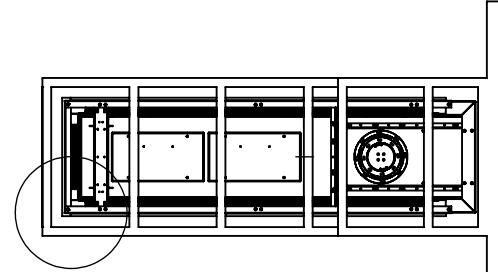

gap to match the max. length of top shelf.


[4" max.]
102 max.

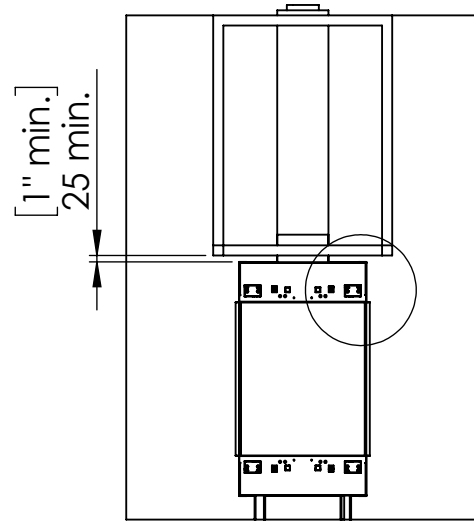

[4" max.]
102 max.


Flat Installation

Last Step - Finishing The Fireplace Wall:

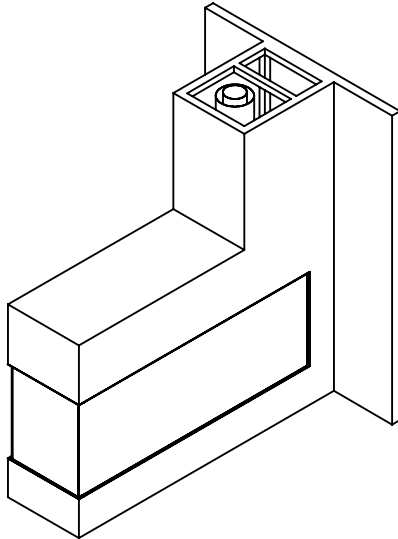

Recess Installation

Step 3 - Framing Front Studs For Recess
After positioning the Fireplace:

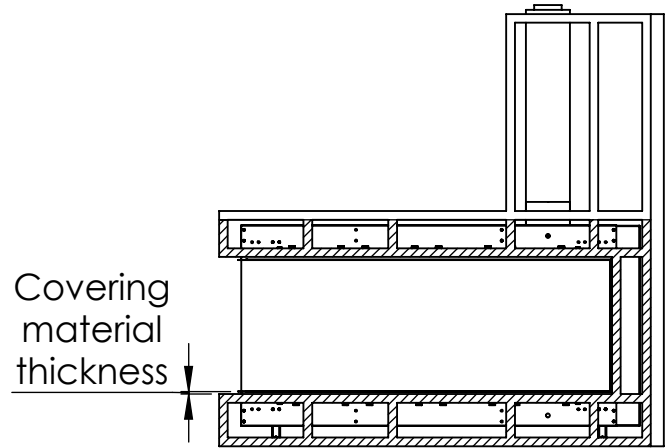

Last Step - Finishing The Fireplace Wall:

