FLARE FIREPLACES

FLARE See Through 70H

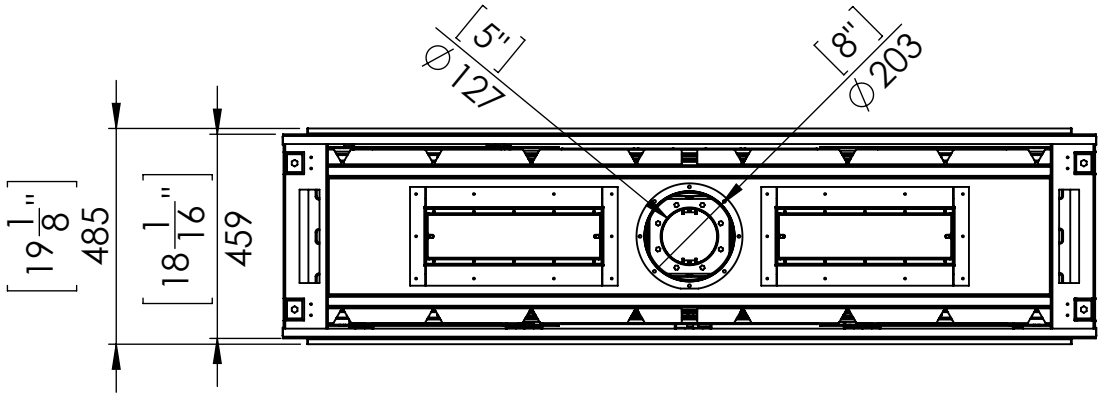

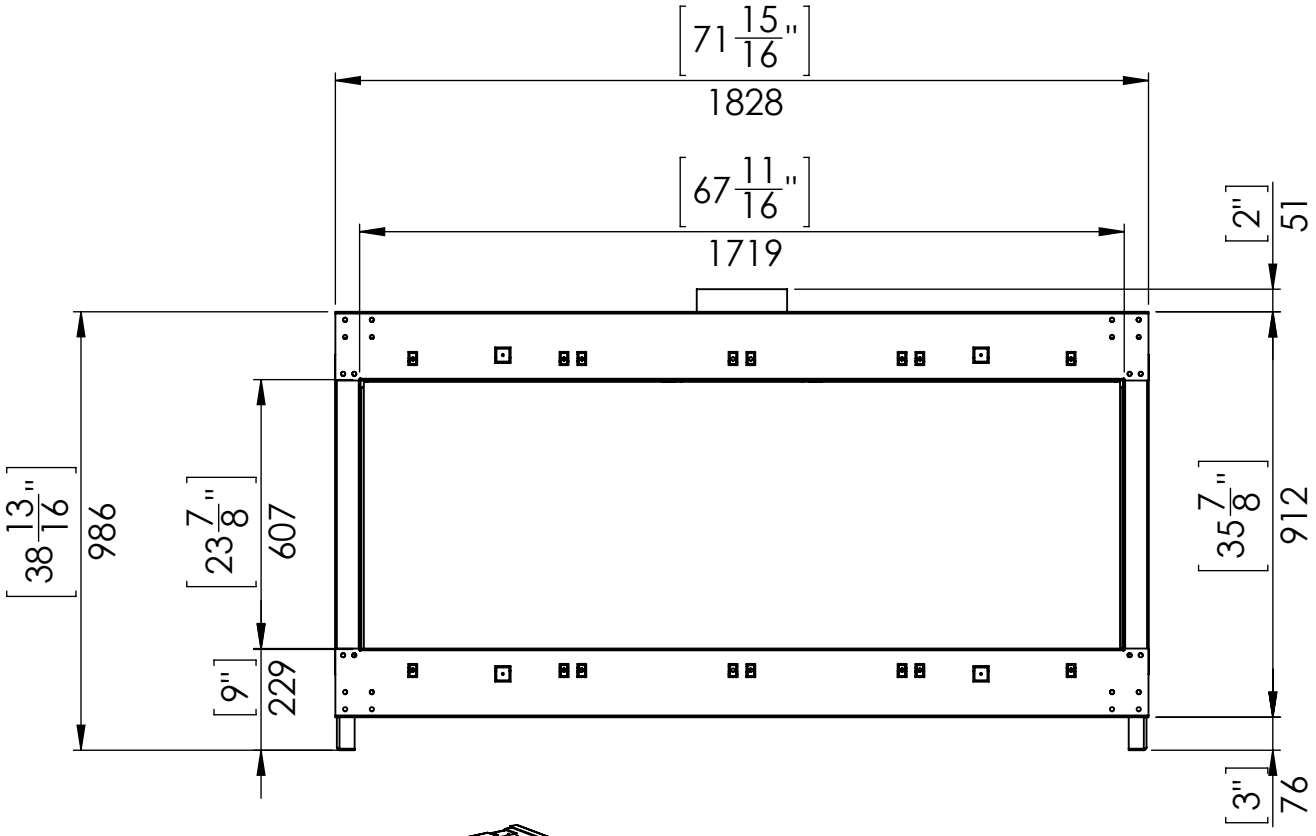

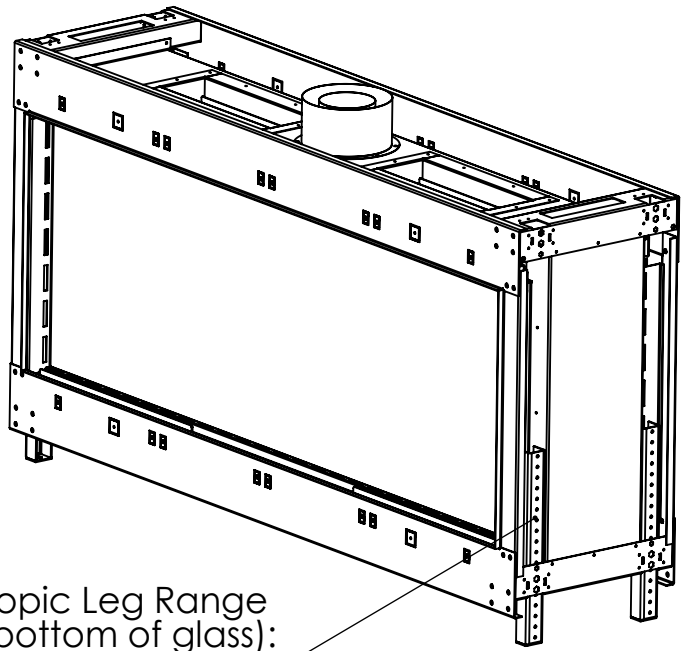

Telescopic Leg Range
(from bottom of glass):
9" - 19"

Appliance Location

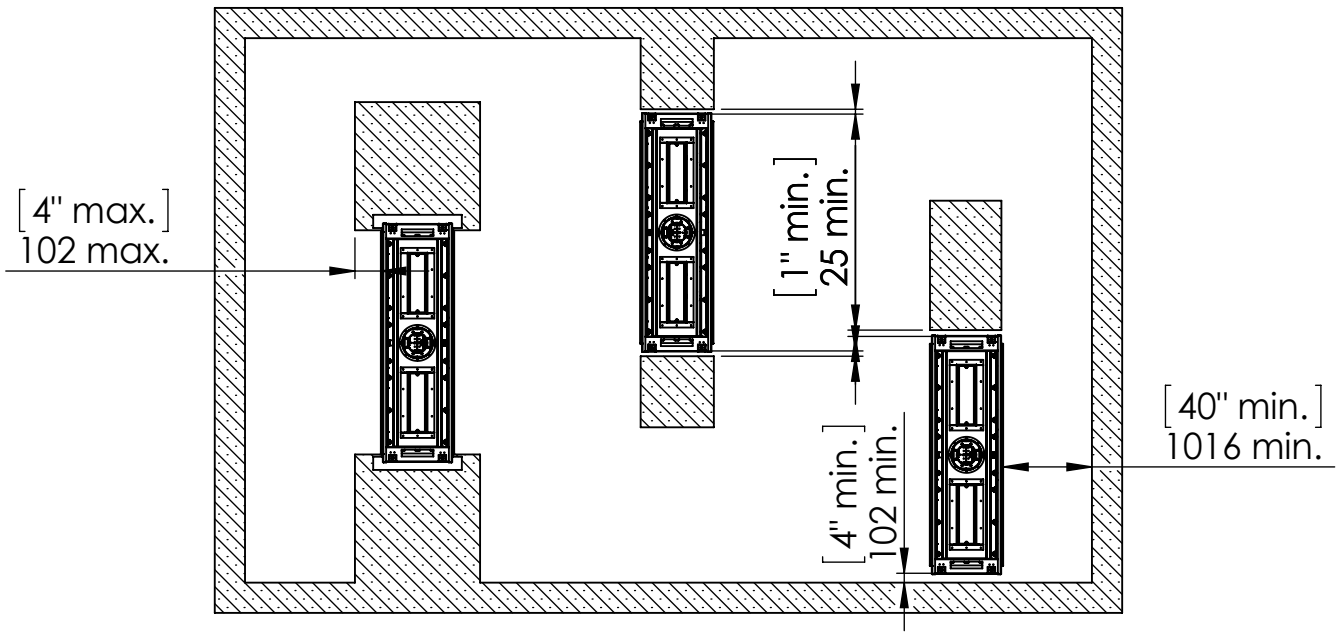

Chimney Installation

Horizontal Termination

For 5 x 8 vent size create 10" x 12" vent termination opening

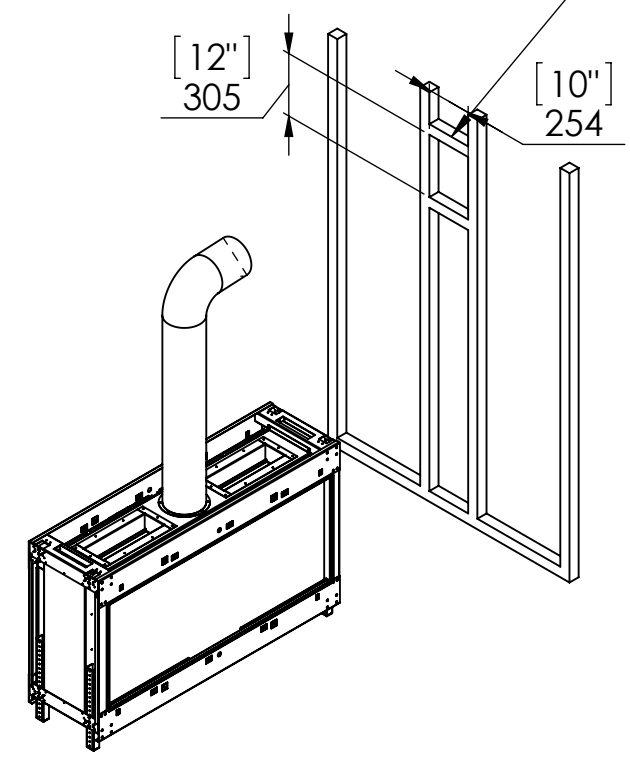

Vertical Termination

For 5 x 8 vent size create 10" x 10" vent termination opening

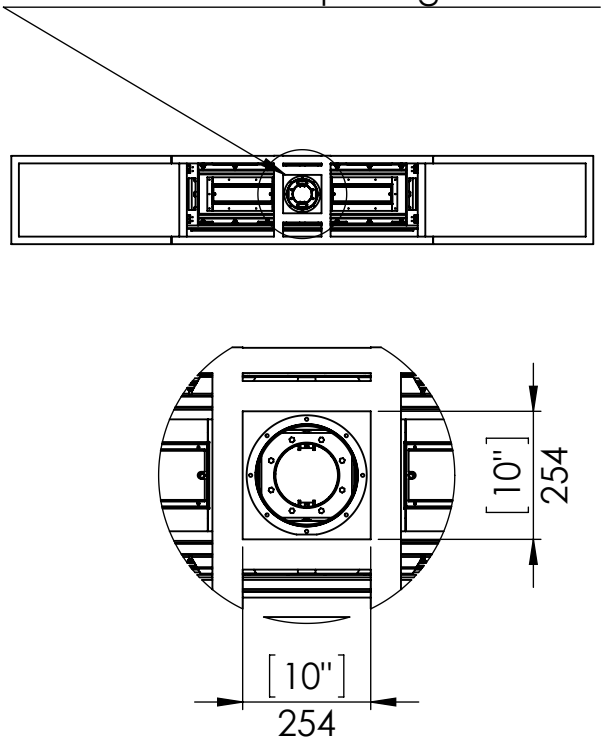

Flat Vs. L Shape Installation For FLARE ST Fireplace

Flat Installation

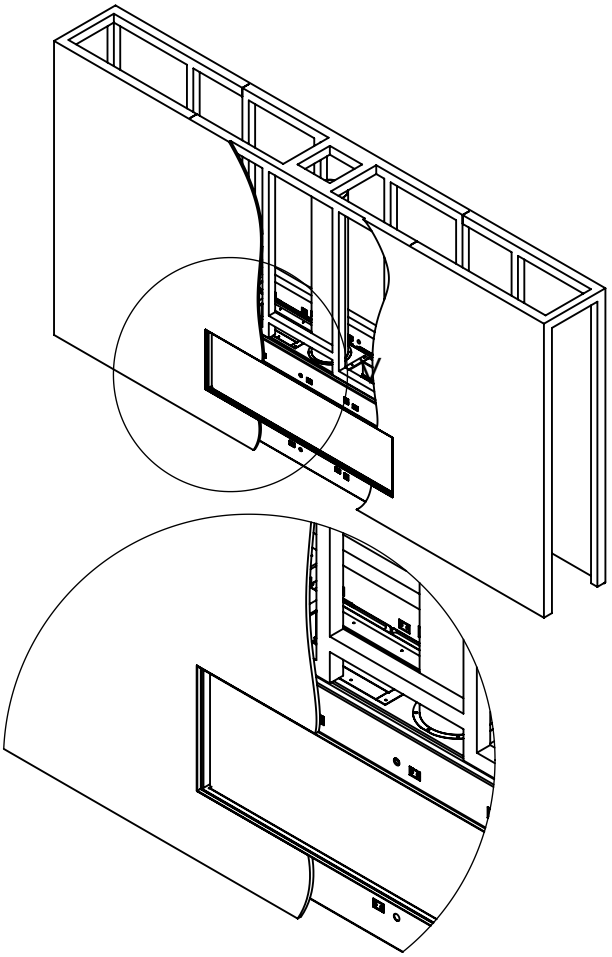

L Shape Installation

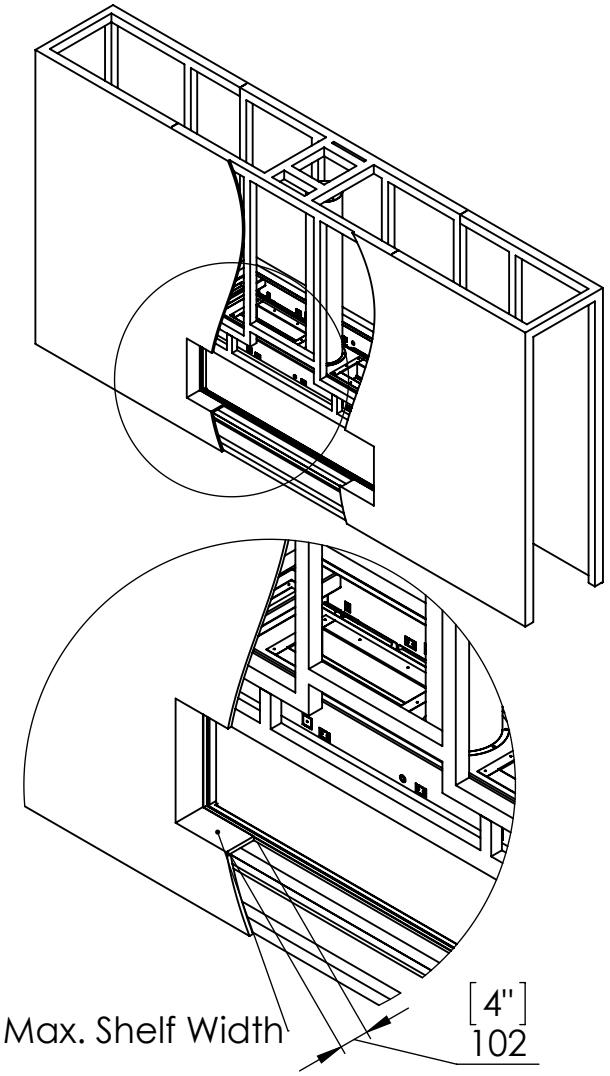

Step 1 - Basic Framing :

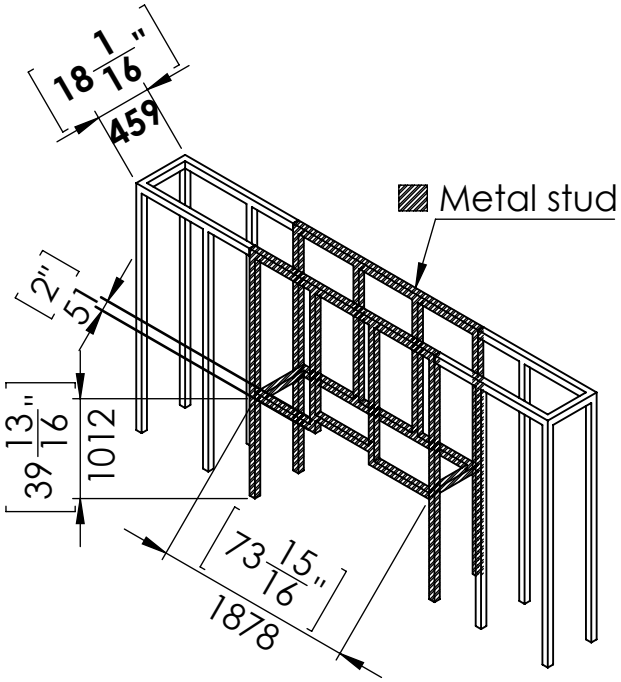

Step 1 - Basic Framing :

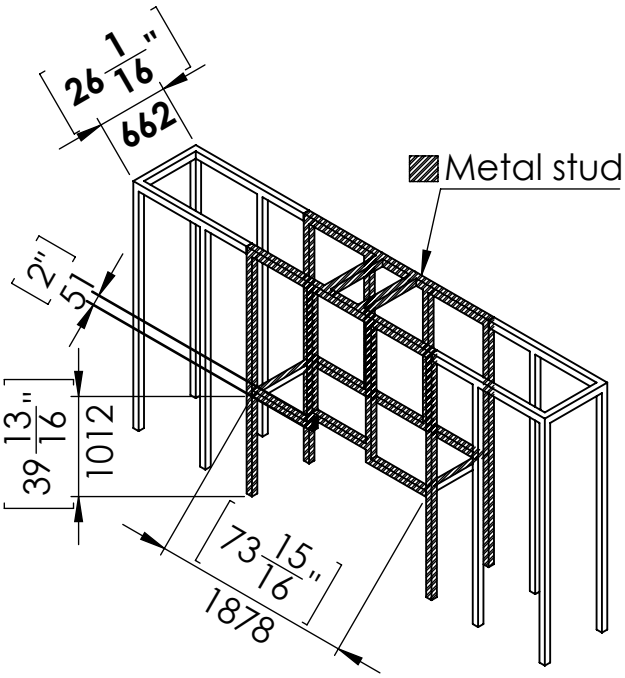

Flat Vs. L Shape Installation For FLARE ST Fireplace

Flat Installation

Step 2 -Positioning the Fireplace:

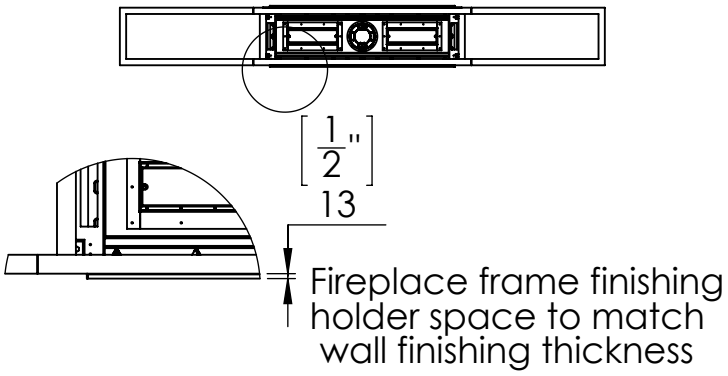

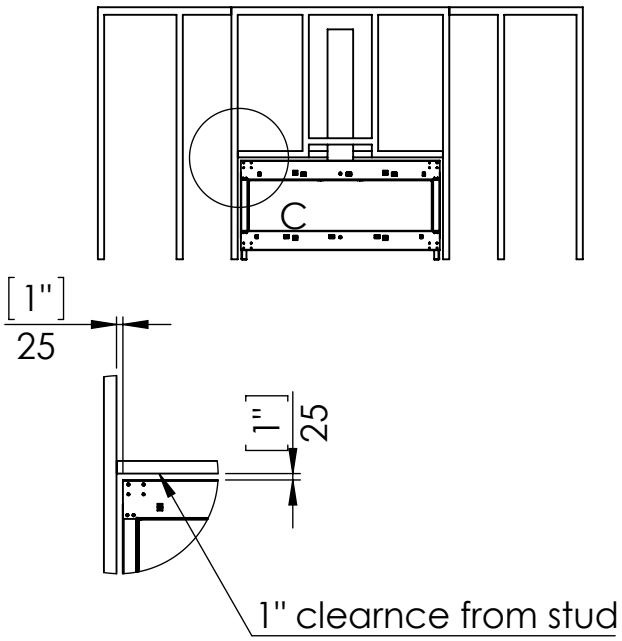

Last Step - Finishing The Fireplace Wall:

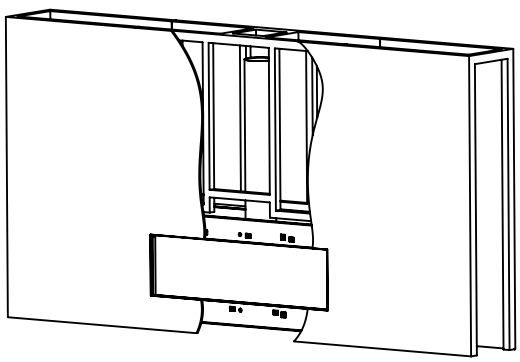

L Shape Installation

Step 2 -Positioning the Fireplace:

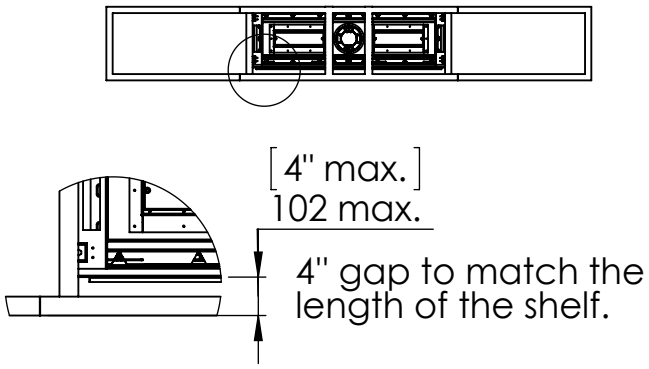

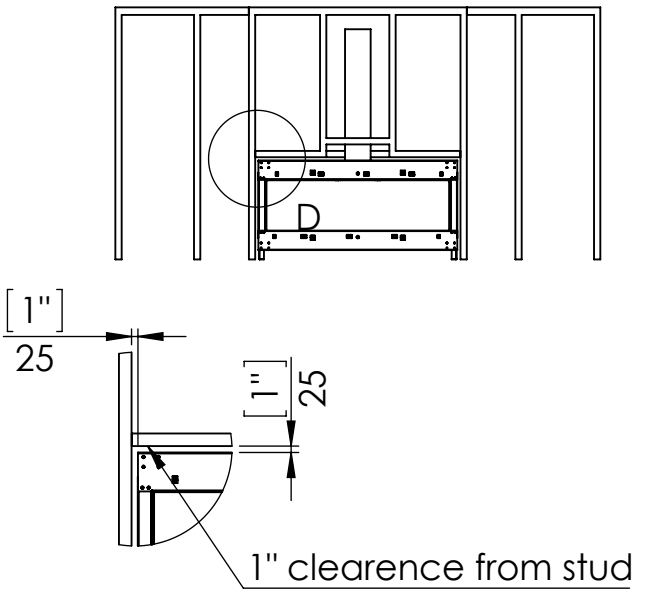

Step 3 - Framing Front Studs For L Shape:

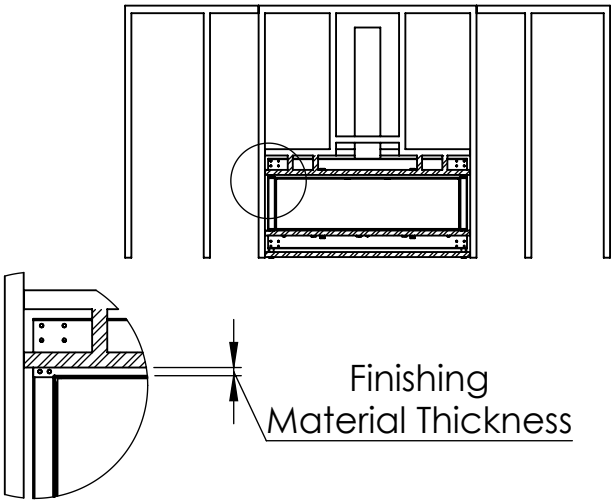

Flat Vs. L Shape Installation For FLARE ST Fireplace

L Shape Finishing Install

Last Step - Finishing The Fireplace Wall:

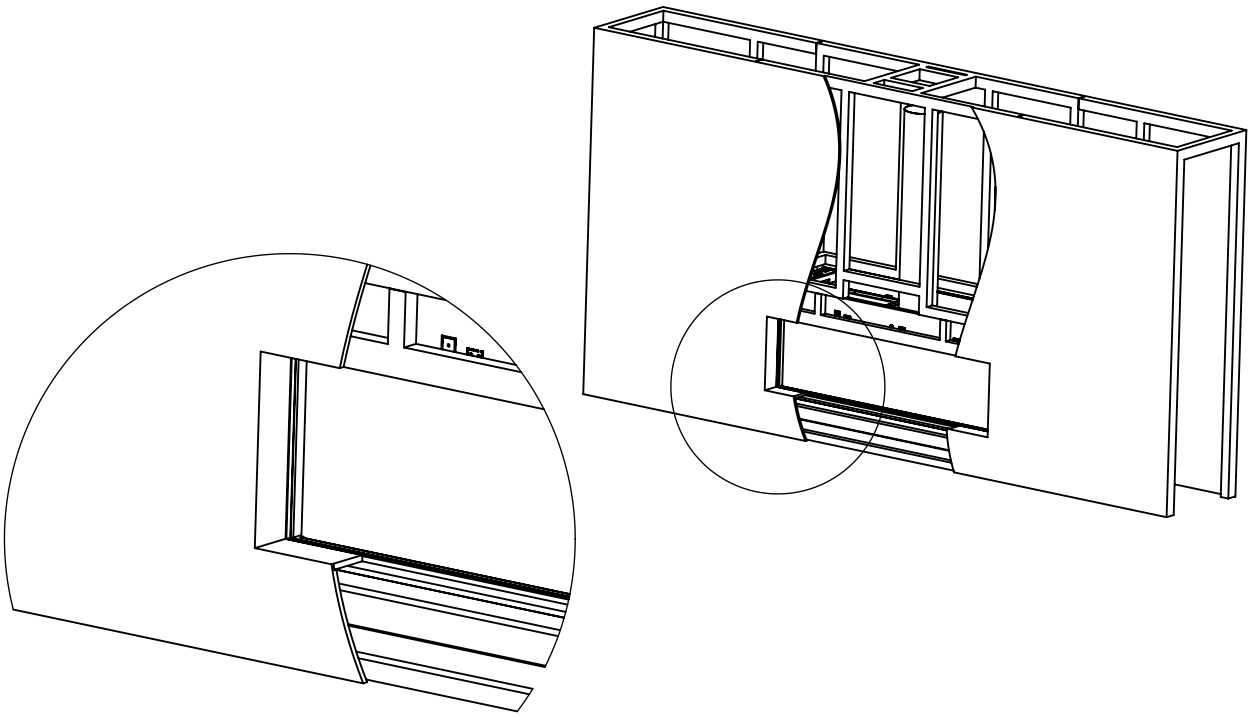

Specifications for Appliance Flare See Through 70H

Factor	NG	LPG
Burner Type	35,80,35	35,80,35
Orifice	500,1000,500	160,320,160
BTU Max.	52200	43000
BTU min.	28000	20000
Kw/h	15.3k	12.6k
Chimney DIA.	5X8	5X8
Manifold Pressure[w.c]	3.2	6.7
Efficiency rate	82	79
Glass Size Length\Width	1700 X 620 mm	66" 15/16 X 24" 9/16'
Appliance Weigh	210Kg	462lb