


Wood studs with non-combustible back wall and metal header.

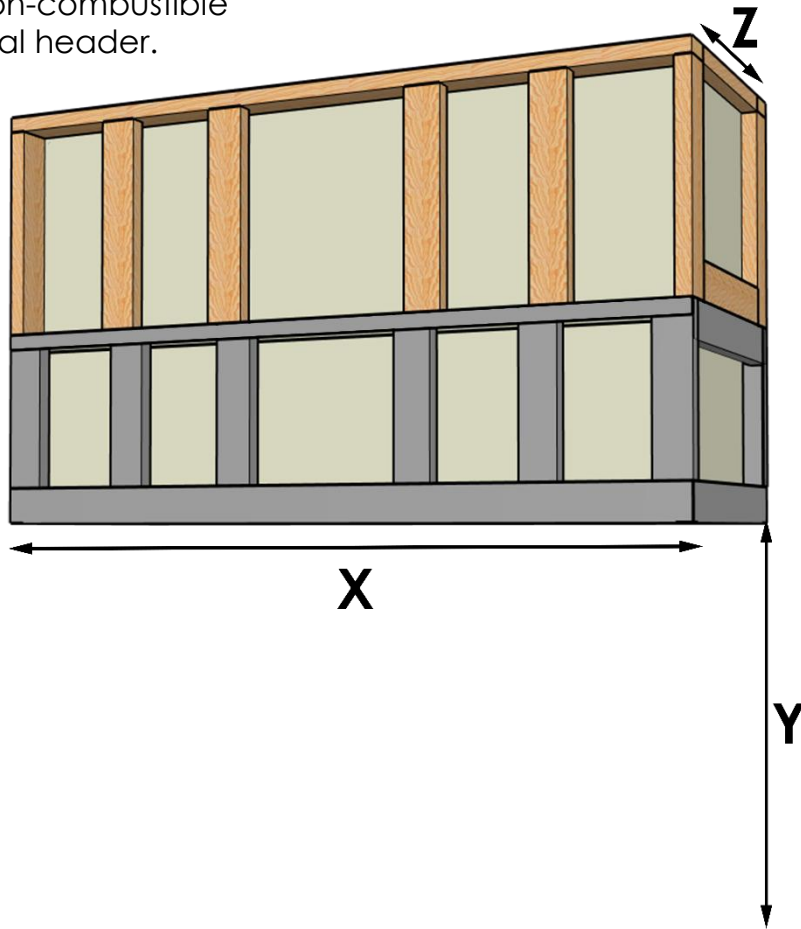


NOTE: Dimension “Y” assumes the fireplace legs are set to the default height of 4”, placing the glass opening at 10” above the floor. This “Y” dimension can change based on where your client wants their viewing window.


*All framing and finishing must be secured to your projects ceiling and must never bear weight on the fireplace in any circumstance. For more information reference the [Installation Manual](#).

| | | | FLUSH | 4" RECESS |
|-------------|----------|-----------|--------------|------------------|
| Size | X | Y | Z | |
| 80 | 82 1/2" | 52 13/16" | 26 7/8" | 34 7/8" |

WOOD - FLAT - SIDE VIEW

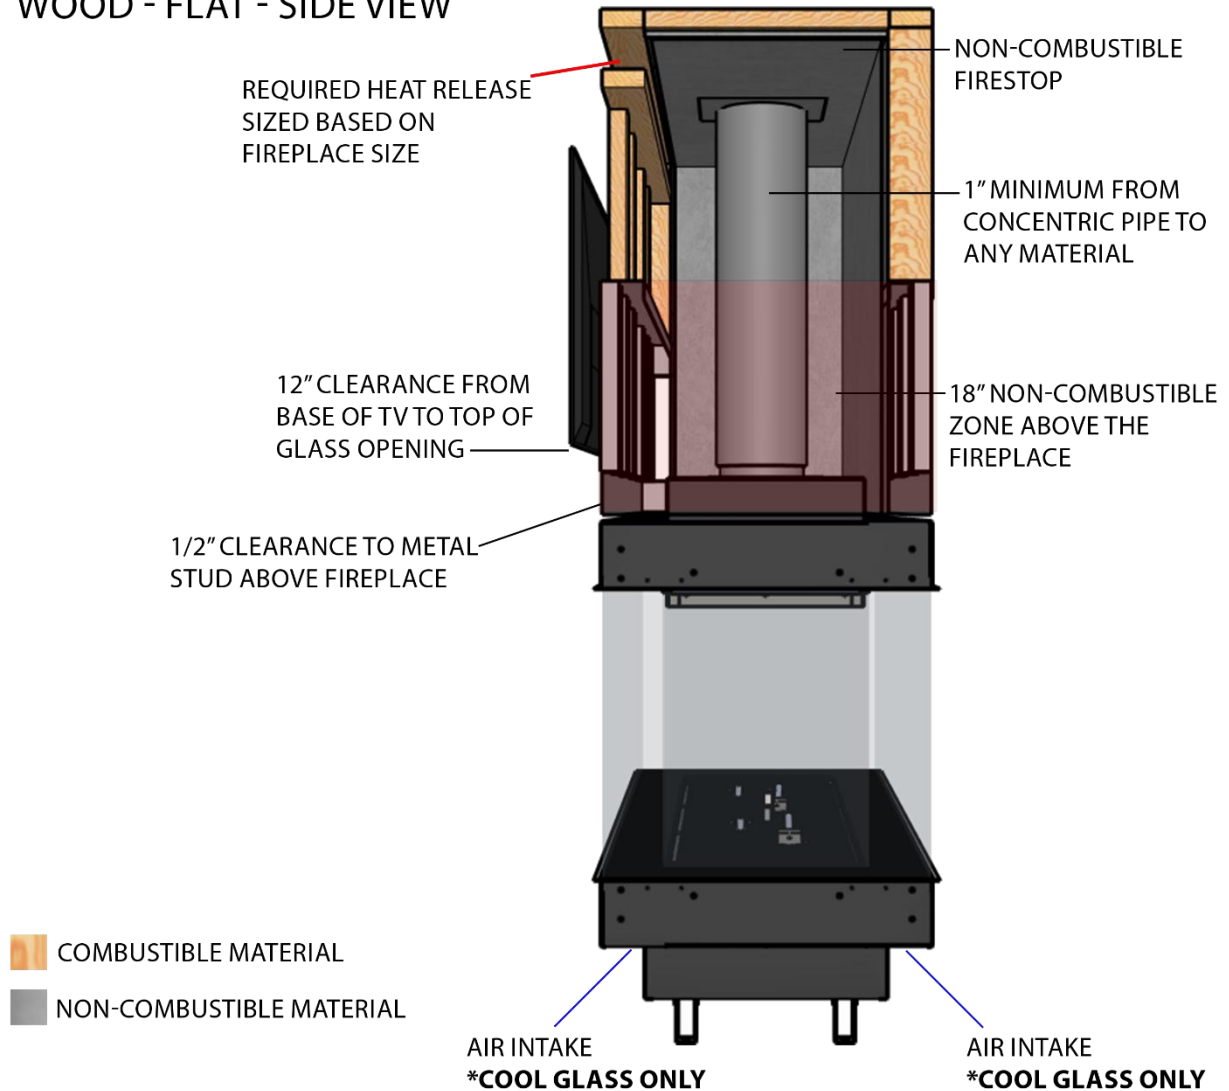

Wood Framing Clearances and Materials Example

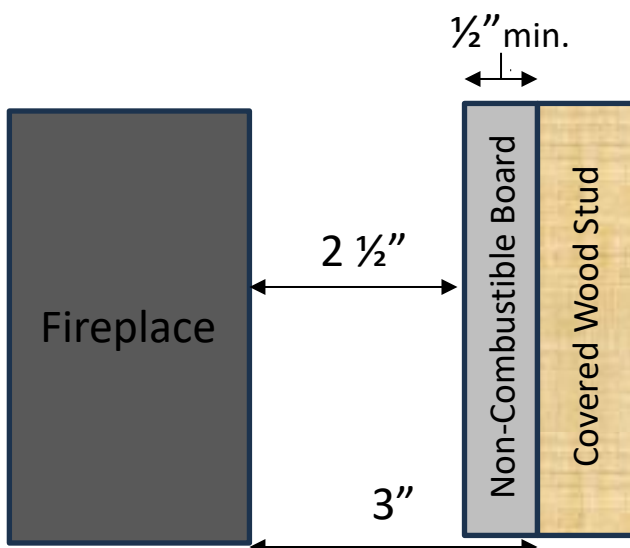

*Any combustible material found within the fireplace cavity must be covered with a minimum 1/2" thick non-combustible board and maintain a 3" clearance to the sides and back of the fireplace.