



High – Front Facing Triple Glass – Metal Framing

Fireplace Dimensions

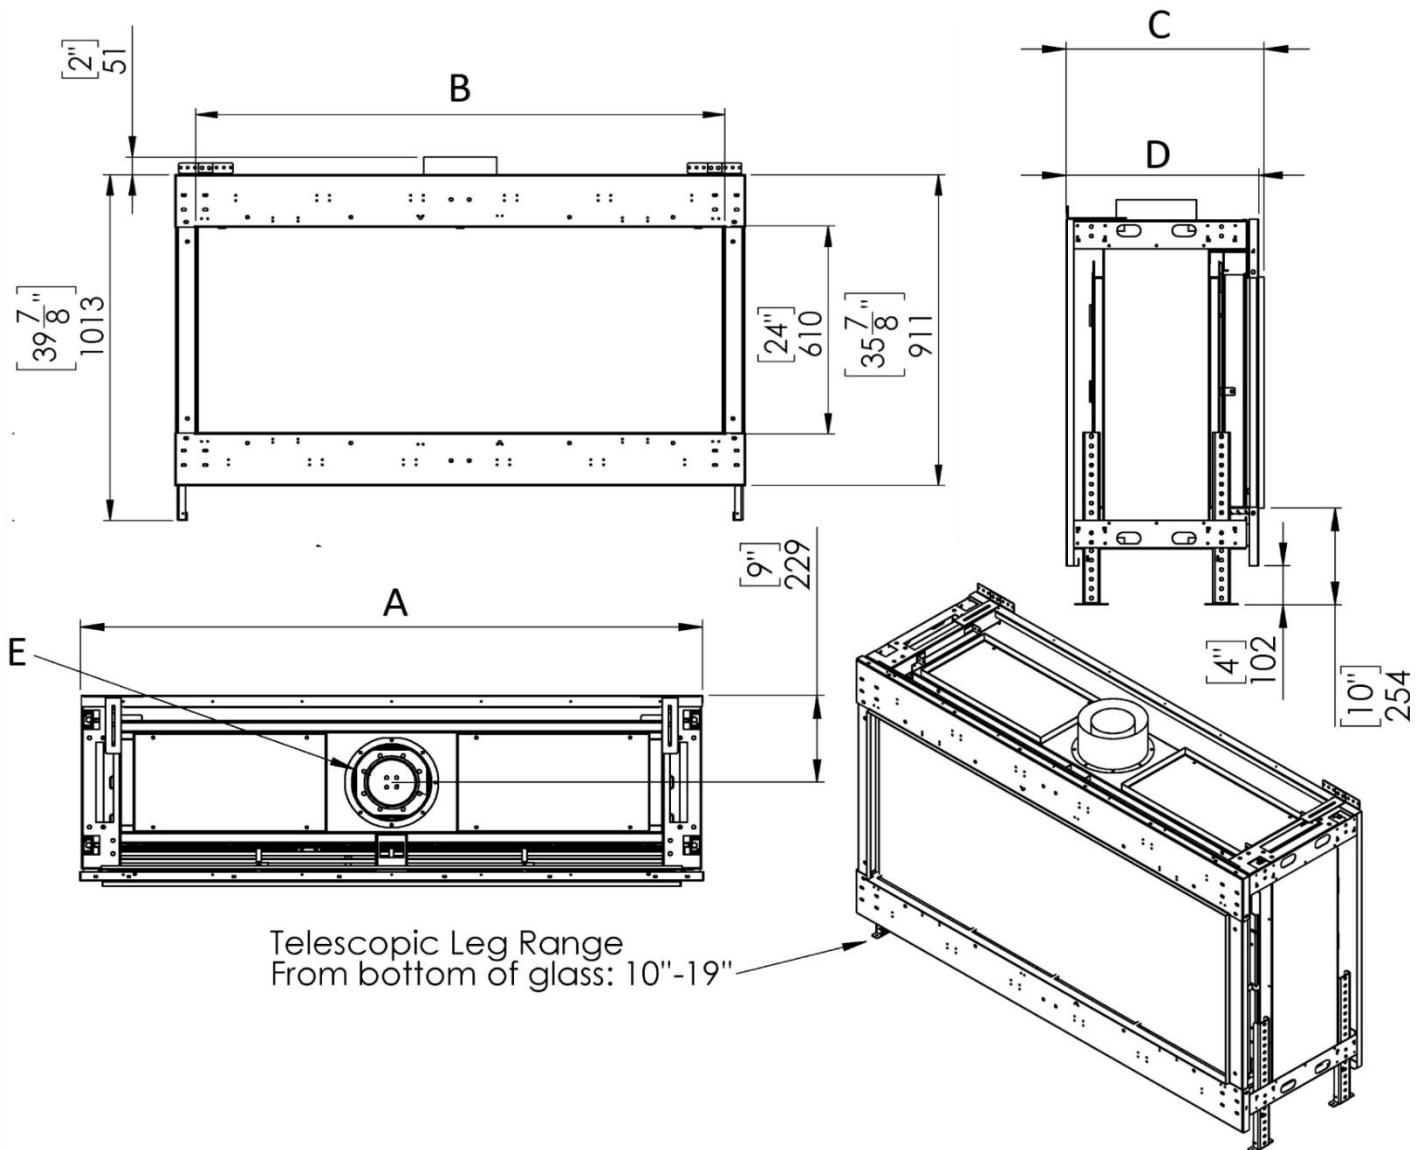

<u>Model</u>		<u>30</u>	<u>45</u>	<u>50</u>	<u>60</u>	<u>70</u>	<u>80</u>	<u>100</u>
A	IN	32 5/8	45 9/16	52 5/16	62 1/8	72 3/16	84 9/16	101 1/2
	MM	828	1157	1328	1577	1833	2147	2578
B	IN	28 1/4	41 1/4	47 15/16	57 13/16	67 5/8	80 1/4	97 3/16
	MM	717	1047	1217	1468	1717	2038	2468
C	IN	19 3/4	19 3/4	19 3/4	19 3/4	19 3/4	19 3/4	19 3/4
	MM	501	501	501	501	501	501	501
D	IN	19 1/4	19 1/4	19 1/4	19 1/4	19 1/4	19 1/4	19 1/4
	MM	488	488	488	488	488	488	488
E	IN	4x6	4x6	5x8	5x8	5x8	5x8	5x8
	MM	101x152	101x152	127x203	127x203	127x203	127x203	127x203


Clearances below are to non-combustible materials.

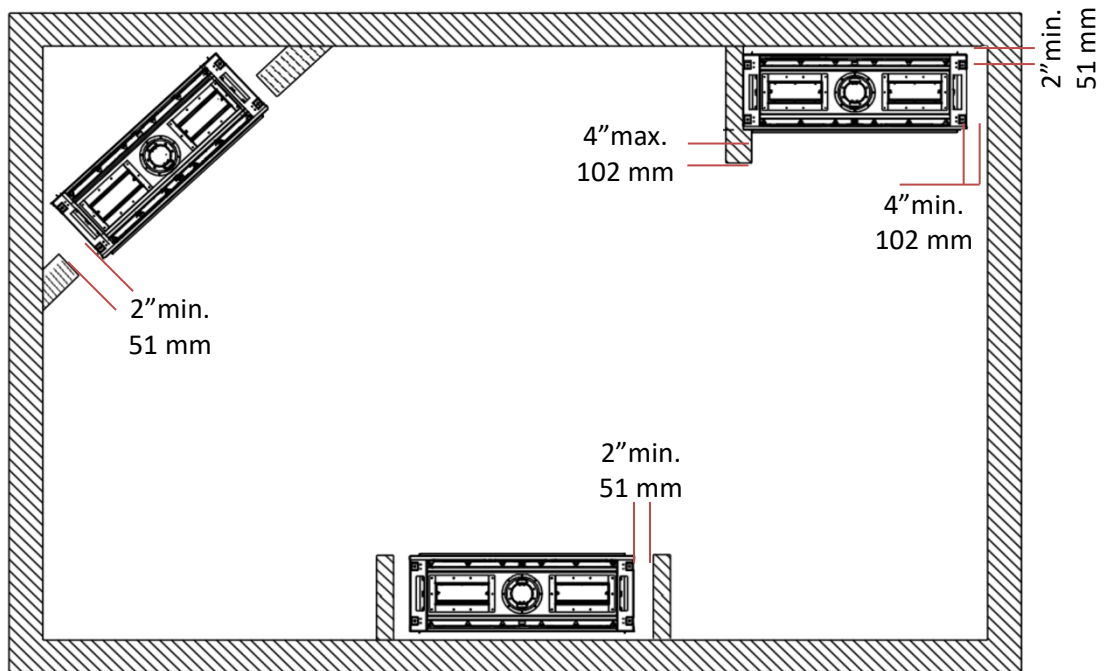

Chimney Installation


Horizontal Termination

For 5x8 vent pipe termination create a 10"x12" opening

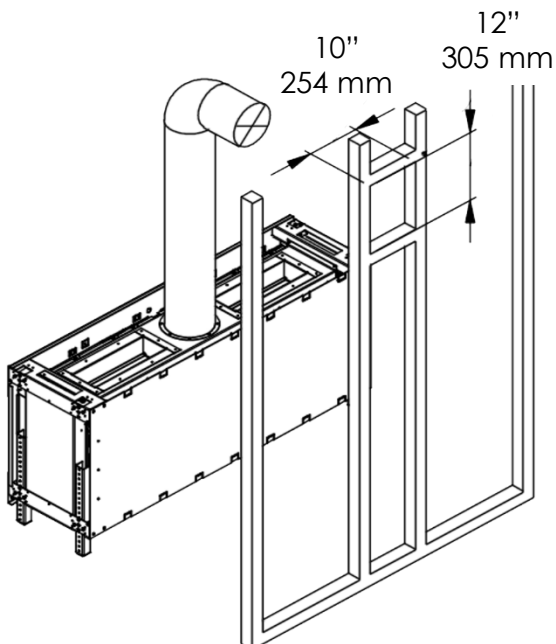


Vertical Termination

For 5x8 vent pipe termination create a 10"x10" opening

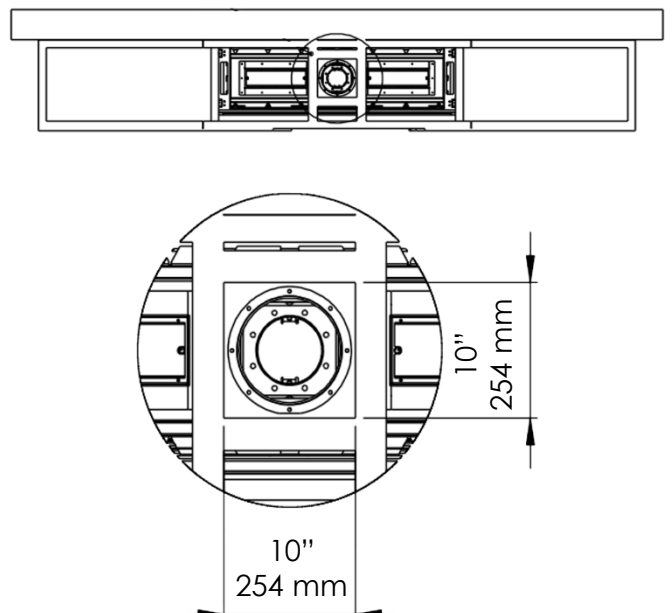


Flat vs Recessed Installation

Flat Installation

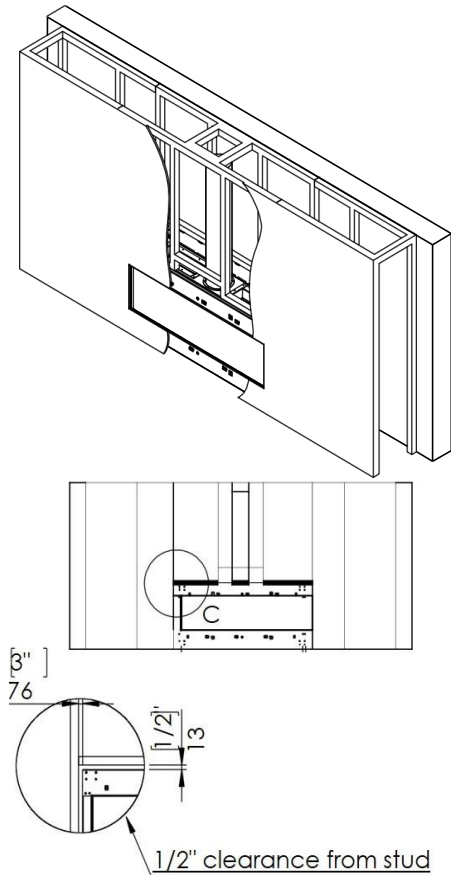

Recessed Installation

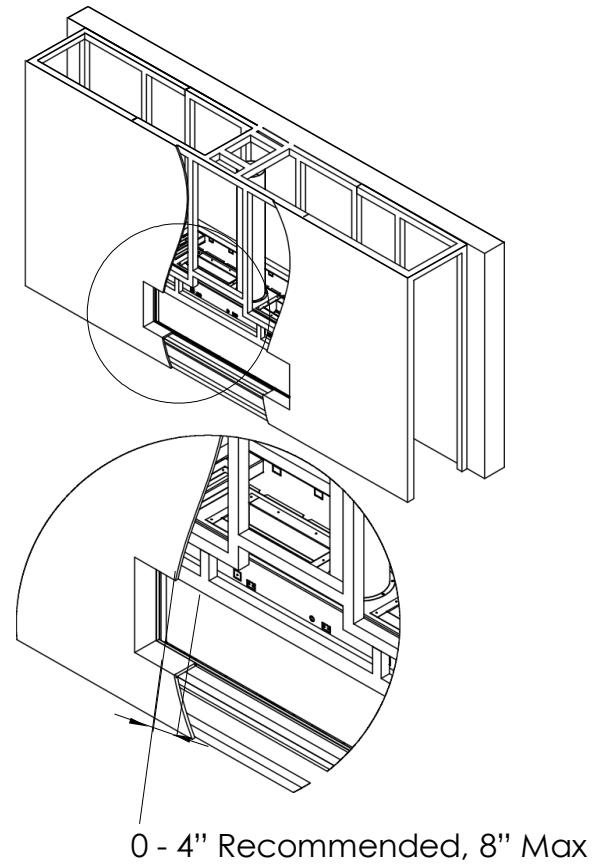

Heat Release and Air Intake

Required Heat Release Open Air-Flow Minimum

80" and 100" Fireplaces - 200 square inches minimum.

60" and 70" Fireplaces - 140 square inches minimum.

30", 45", 50" Fireplaces - 100 square inches minimum.

Required Air Intake Open Air-Flow Minimum

80" and 100" Fireplaces - 100 square inches minimum.

60" and 70" Fireplaces - 70 square inches minimum.


30", 45", 50" Fireplaces - 50 square inches minimum.


*(*Blower Kit and Cool Glass)*

*(**See Through and Room Definer Requirements Double.)*

*(***Openings are measured for open air-flow)*

Top Shadow Line

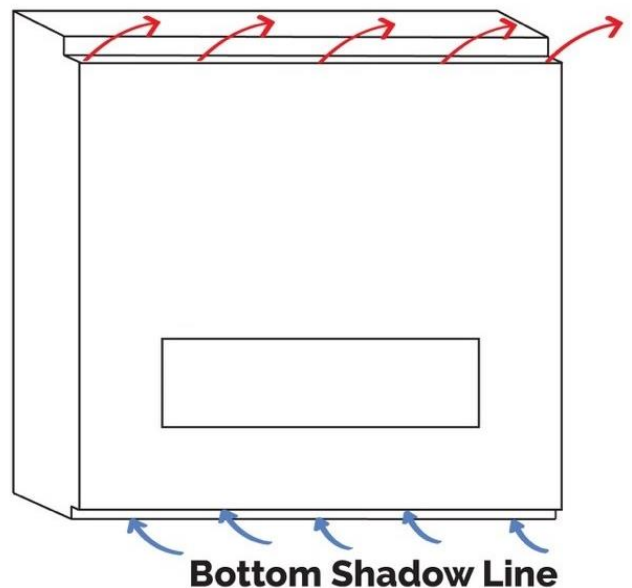


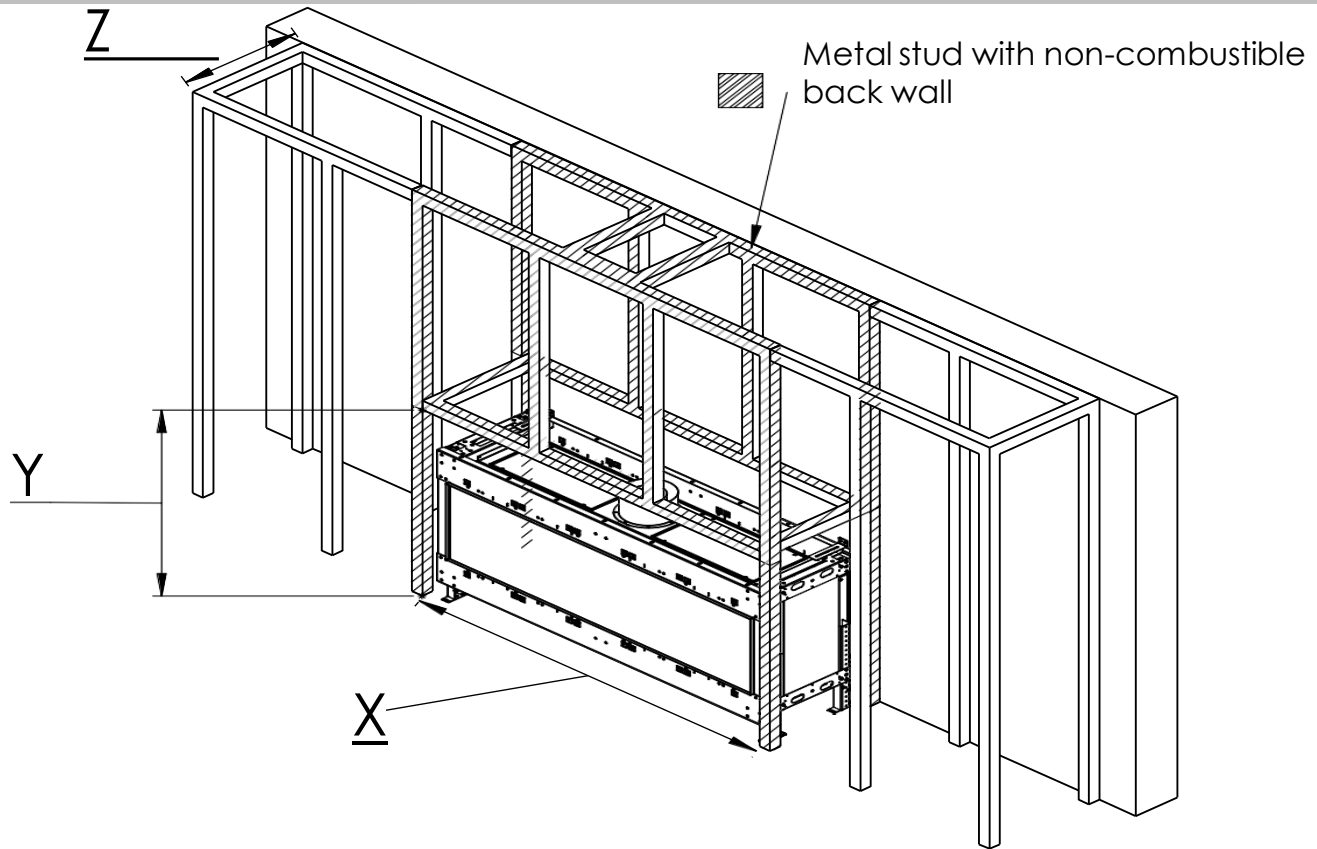


NOTE: Dimension “Y” assumes the fireplace legs are set to the default height of 4”, placing the glass opening at 10” above the floor. This “Y” dimension can change based on where your client wants their viewing window.

*All framing and finishing must be secured to your projects back wall, ceiling or floor and must never bear weight on the fireplace in any circumstance. For more information reference the [Installation Manual](#).

		X	Y	Z	
				FLAT	4" RECESS
30	IN	33 5/8	40 6/16	21 1/4	25 1/4
	MM	1182	1026	539	641
45	IN	46 9/16	40 6/16	21 1/4	25 1/4
	MM	1182	1026	539	641
50	IN	53 5/16	40 6/16	21 1/4	25 1/4
	MM	1328	1026	539	641
60	IN	63 1/8	40 6/16	21 1/4	25 1/4
	MM	1603	1026	539	641
70	IN	73 3/16	40 6/16	21 1/4	25 1/4
	MM	1858	1026	539	641
80	IN	85 9/16	40 6/16	21 1/4	25 1/4
	MM	2173	1026	539	641
100	IN	102 1/2	32 8/16	21 1/4	25 1/4
	MM	2603	825	539	641

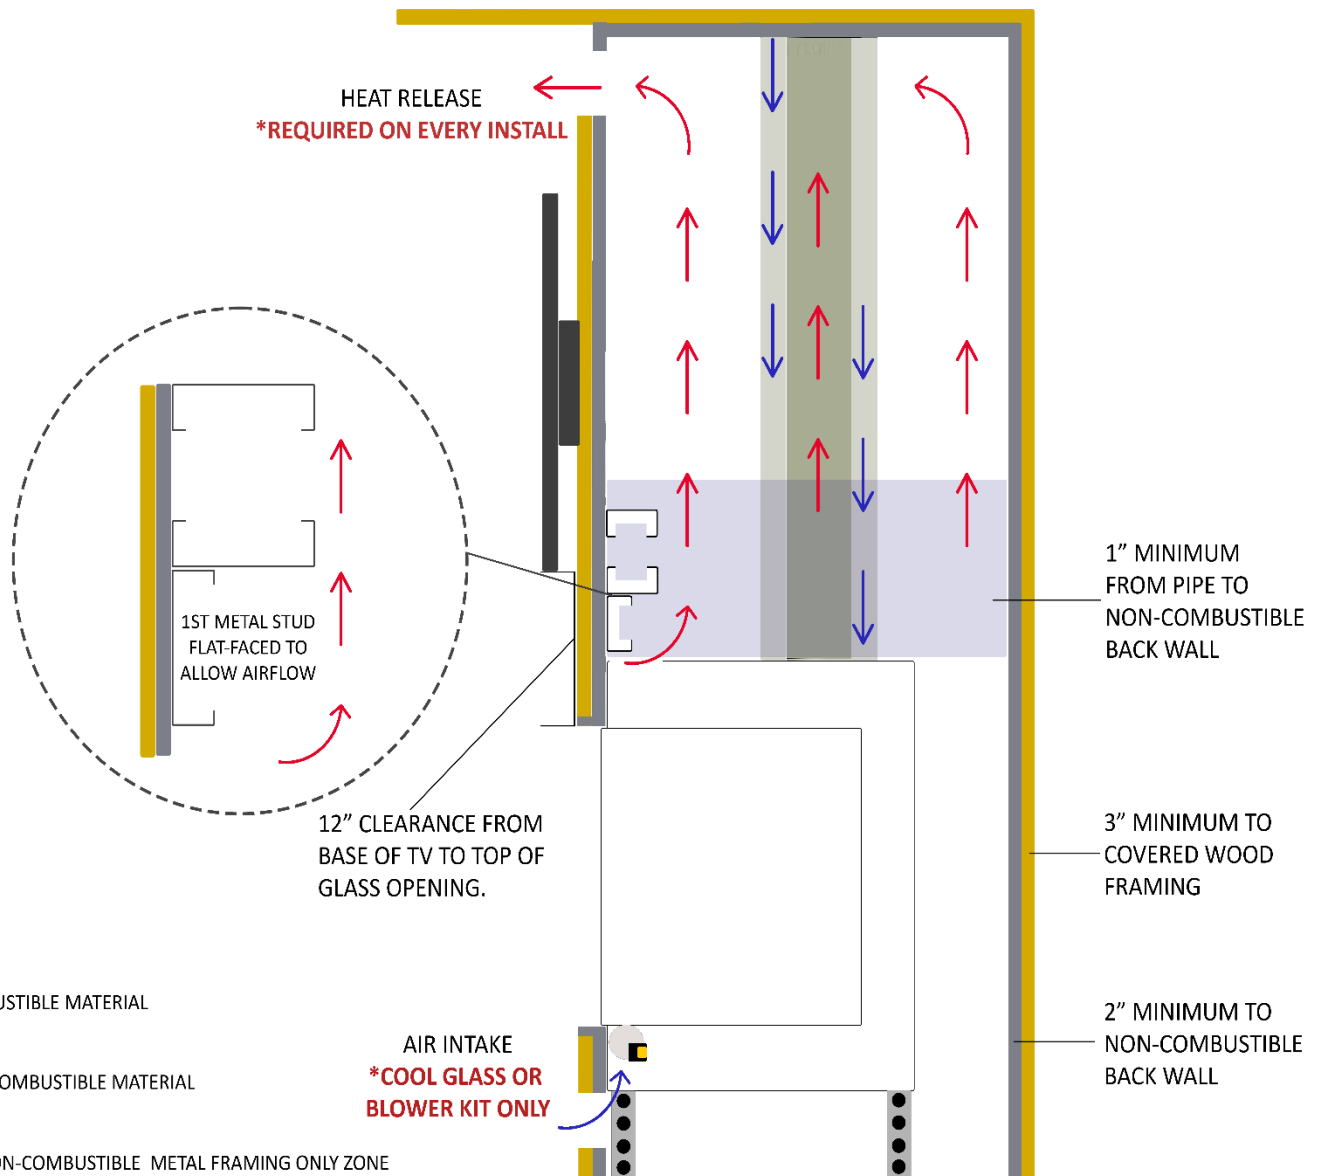

Metal Framing Clearances and Materials Example

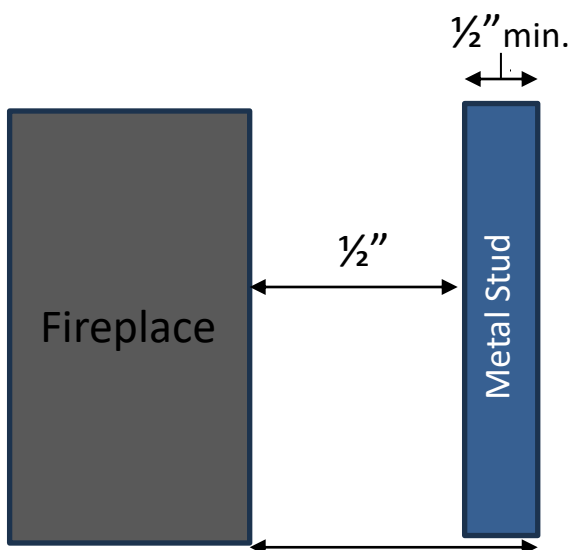

*Any combustible material found within the fireplace cavity must be covered with a minimum $\frac{1}{2}"$ thick non-combustible board and maintain a 3" clearance to the sides and back of the fireplace.