



Extra High – See Through Triple Glass – Wood Framing

Fireplace Dimensions

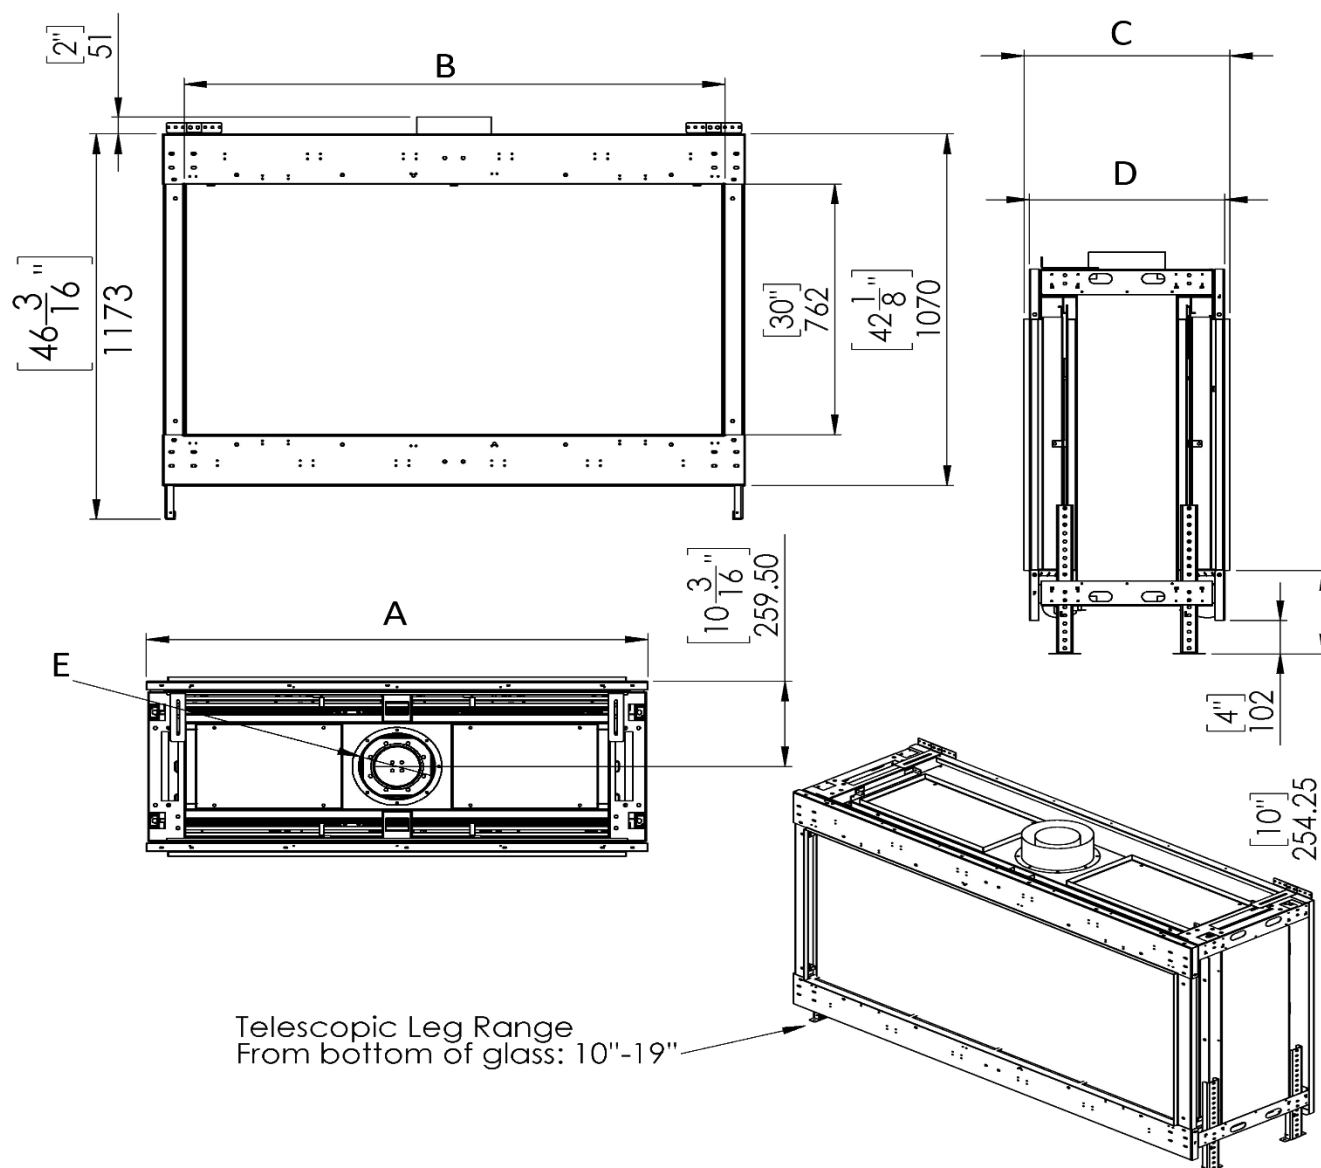

Model		45	50	60	70	80	100
A	IN	45 13/16	52 1/2	62 5/16	72 3/16	84 3/4	101 5/8
	MM	1163	1333	1582	1833	2152	2581
B	IN	41 1/4	47 15/16	57 13/16	67 5/8	80 1/4	97 3/16
	MM	1047	1217	1468	1717	2038	2468
C	IN	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2	21 1/2
	MM	546	546	546	546	546	546
D	IN	20 7/16	20 7/16	20 7/16	20 7/16	20 7/16	20 7/16
	MM	519	519	519	519	519	519
E	IN	4x6	5x8	5x8	5x8	5x8	5x8
	MM	101x152	127x203	127x203	127x203	127x203	127x203


Clearances below are to non-combustible materials.

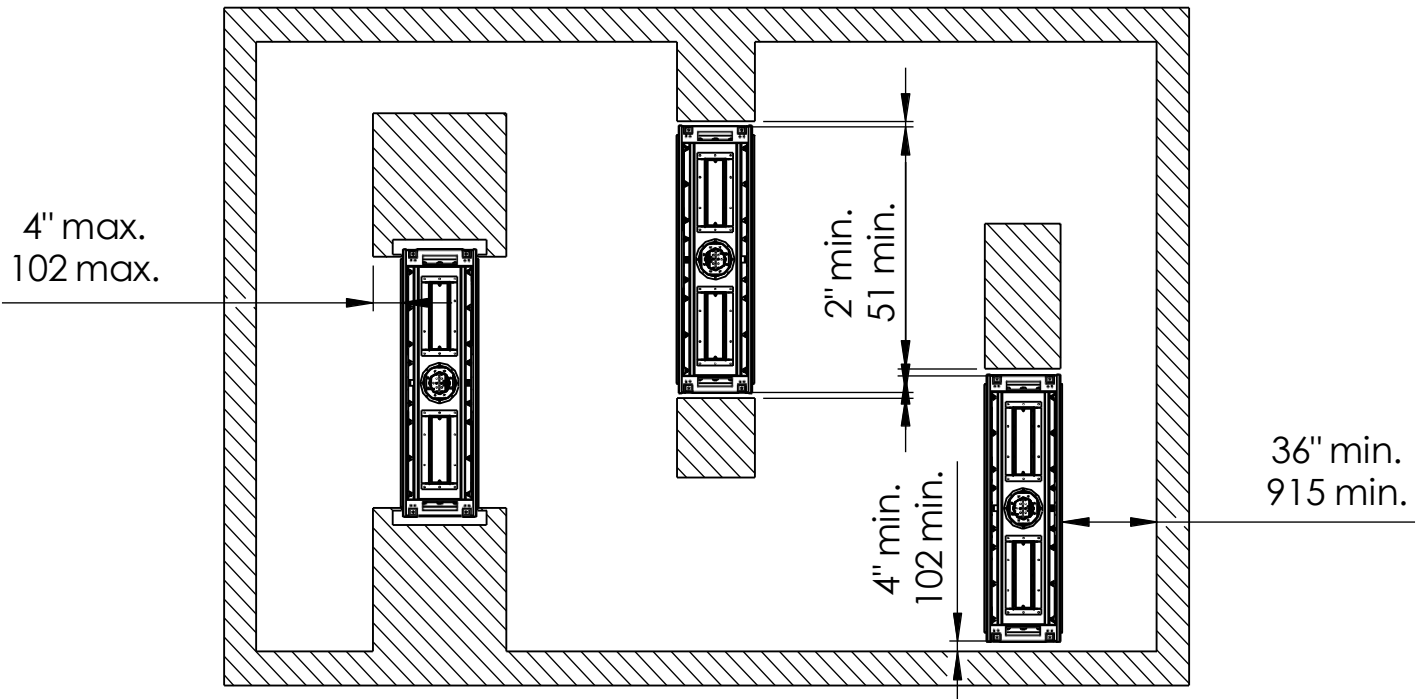

Chimney Installation


Horizontal Termination

For 5x8 vent pipe termination create a 10"x12" opening

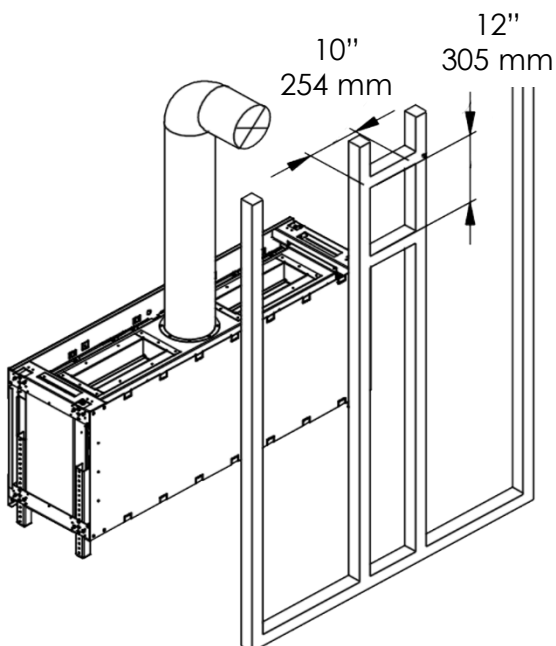


Vertical Termination


For 5x8 vent pipe termination create a 10"x10" opening

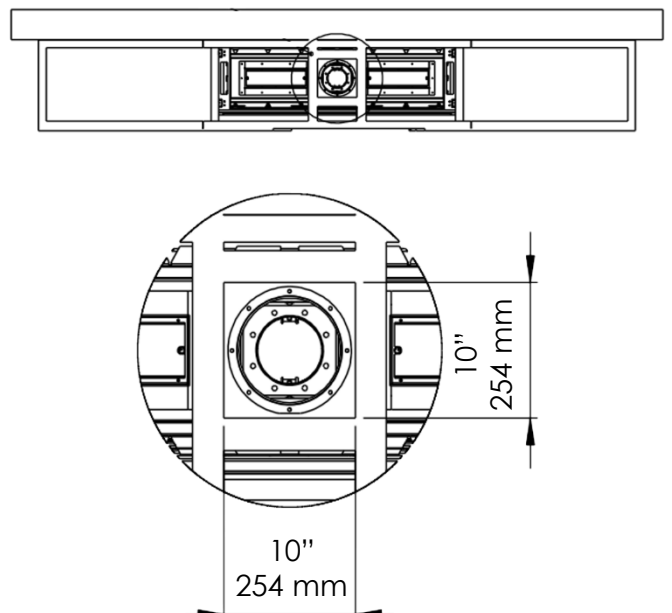

Flat Installation

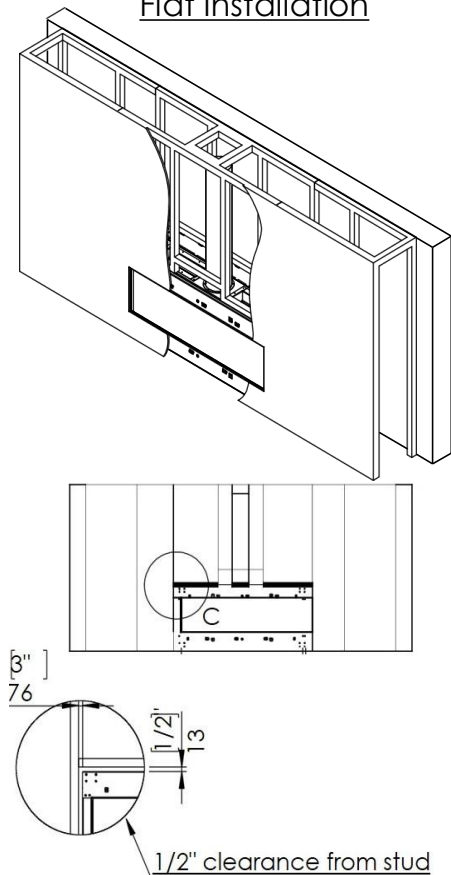

Recessed Installation

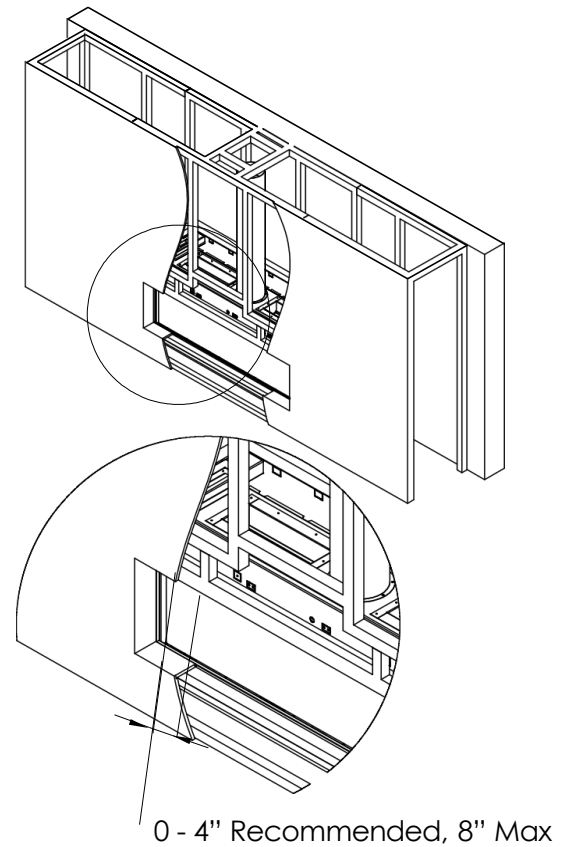

Heat Release and Air Intake

Required Heat Release Open Air-Flow Minimum

80" and 100" Fireplaces - 200 square inches minimum.

60" and 70" Fireplaces - 140 square inches minimum.

30", 45", 50" Fireplaces - 100 square inches minimum.

Required Air Intake Open Air-Flow Minimum

80" and 100" Fireplaces - 100 square inches minimum.

60" and 70" Fireplaces - 70 square inches minimum.


30", 45", 50" Fireplaces - 50 square inches minimum.


*(*Blower Kit and Cool Glass)*

*(**See Through and Room Definer Requirements Double.)*

*(***Openings are measured for open air-flow)*

Top Shadow Line

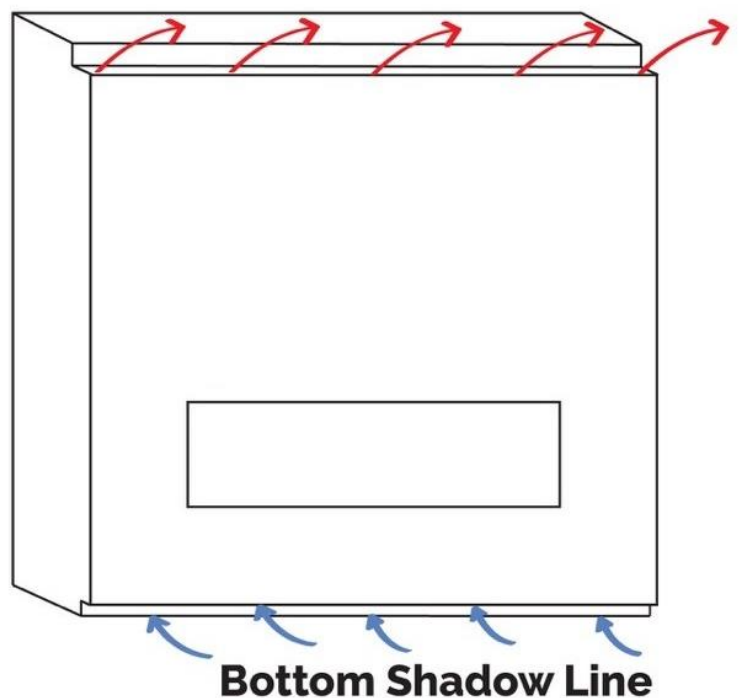


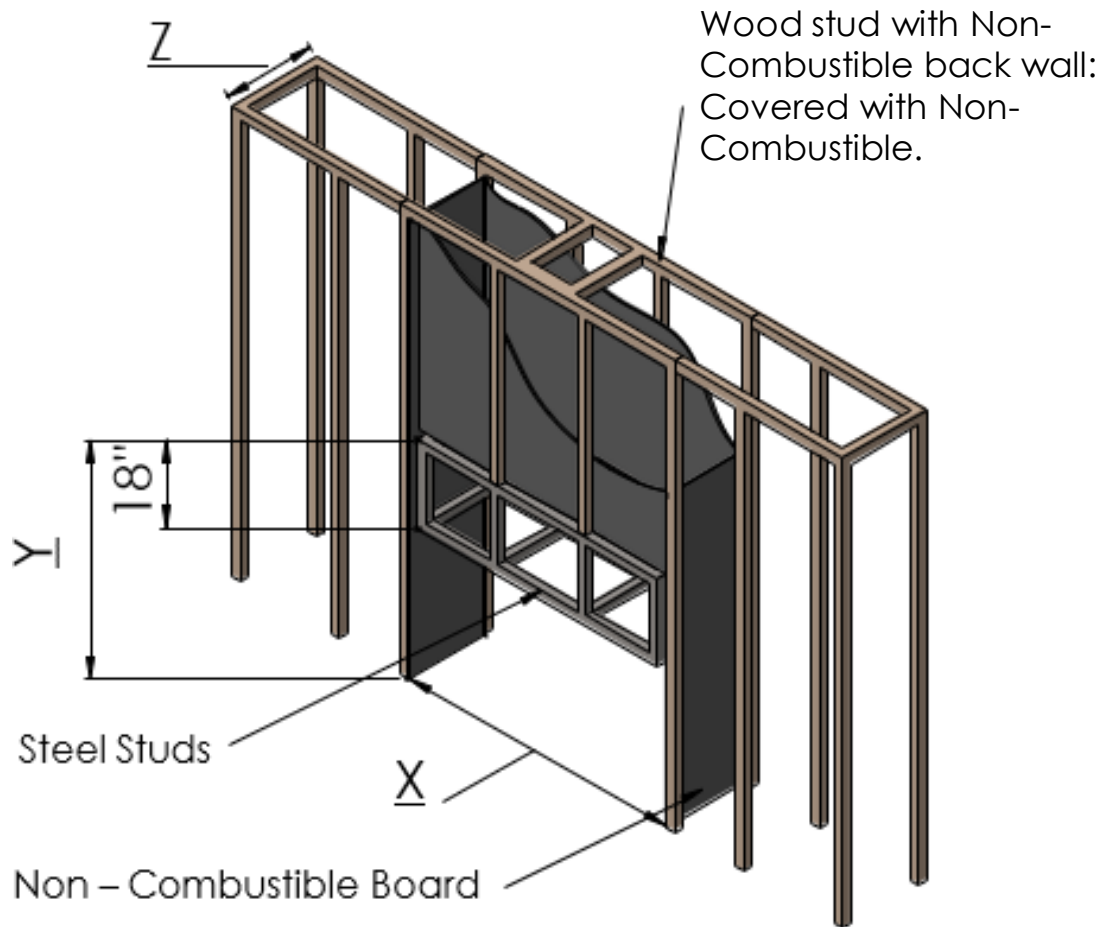


NOTE: Dimension “Y” assumes the fireplace legs are set to the default height of 4”, placing the glass opening at 10” above the floor. This “Y” dimension can change based on where your client wants their viewing window.

*All framing and finishing must be secured to your projects back wall, ceiling or floor and must never bear weight on the fireplace in any circumstance. For more information reference the [Installation Manual](#).

		X	Y	Z	
				FLAT	4" RECESS (ON BOTH SIDES)
45	IN	51 13/16	64 11/16	20 7/16	28 7/16
	MM	1316	1643	519	722
50	IN	58 1/2	64 11/16	20 7/16	28 7/16
	MM	1485	1643	519	722
60	IN	68 5/16	64 11/16	20 7/16	28 7/16
	MM	1735	1643	519	722
70	IN	78 3/16	64 11/16	20 7/16	28 7/16
	MM	1985	1643	519	722
80	IN	90 3/4	64 11/16	20 7/16	28 7/16
	MM	2305	1643	519	722
100	IN	107 5/8	64 11/16	20 7/16	28 7/16
	MM	2733	1643	519	722

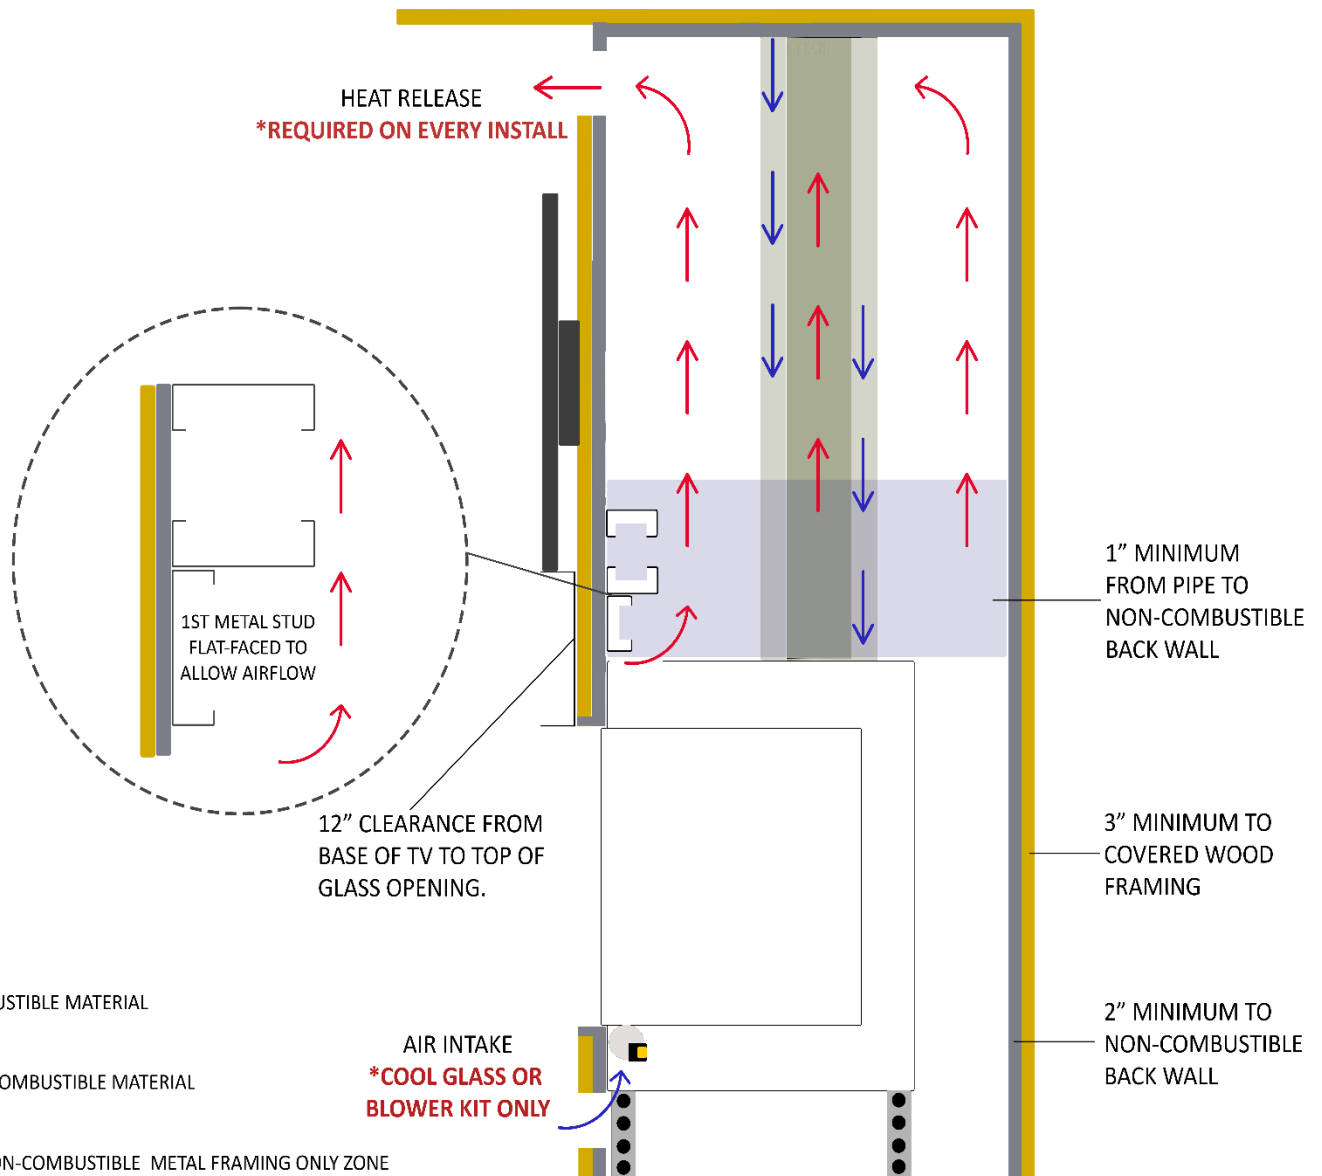

Wood Framing Clearances and Materials Example

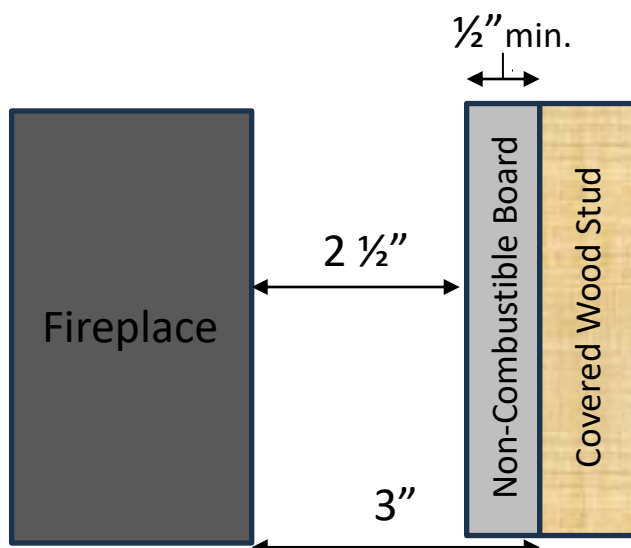

*Any combustible material found within the fireplace cavity must be covered with a minimum 1/2" thick non-combustible board and maintain a 3" clearance to the sides and back of the fireplace.