


After Conversion Pressure Verification

The Natural Gas (NG) gas pressure verification must be done by a licensed professional.


1) Validate **Inlet** Pressure using monometer. See “Inlet” tap in image below.

PLEASE NOTE: Loosen screw only to validate pressure, tighten upon completion.

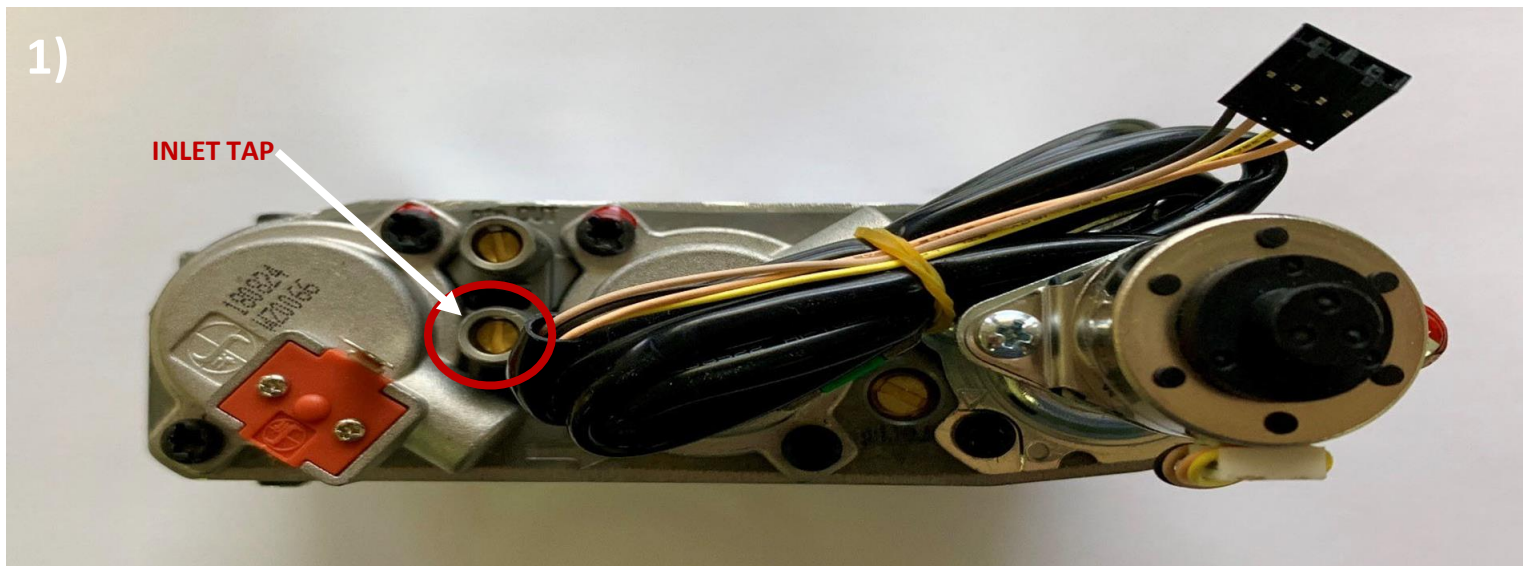

2) Validate **Outlet** Pressure using monometer. See “Outlet” tap in image below.

PLEASE NOTE: Loosen screw only to validate pressure, tighten upon completion.

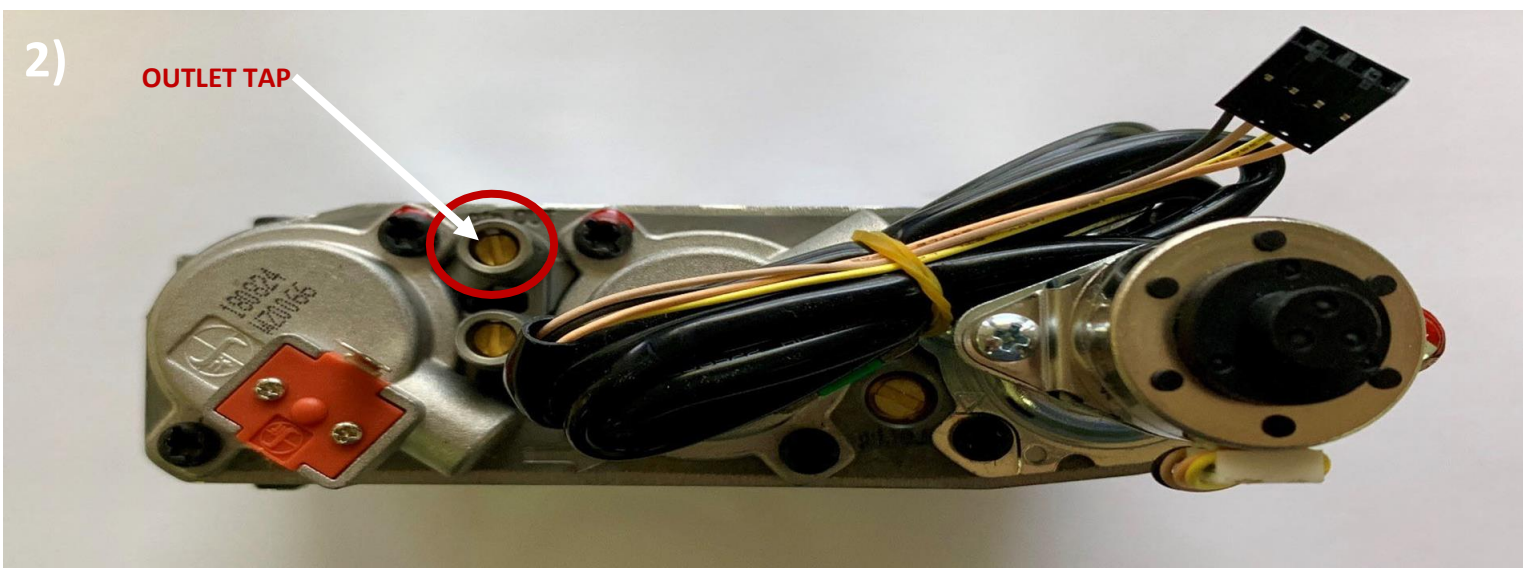

NG INLET PRESSURE: 7.2" WC – 8.2" WC


NG MANIFOLD PRESSURE: 3.5" WC

Air Shutter Adjustment(s)

Natural Gas (NG) units require different air shutter settings to achieve the most natural & cleanest burn. Keep in mind Flare Fireplaces which are 60" & above will have 3 separate burners, so you'll need to adjust each air shutter individually to achieve a uniform burn across your unit.


PLEASE NOTE: Incorrect air shutter adjustments will result in excess soot on the glass.

- 1) Locate your air shutter adjustment on the fireplace burner(s) between the - & + signs.

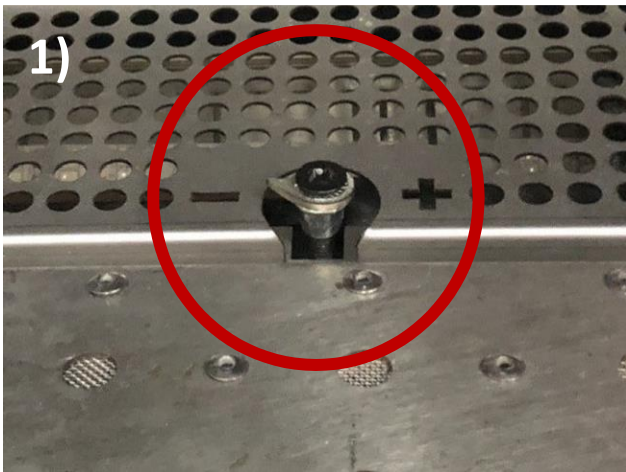


- 2) Using a phillips head screwdriver adjust mix of air & gas needed for a natural looking burn. See images below for what each setting achieves.


NO AIR | ORANGE FLAME

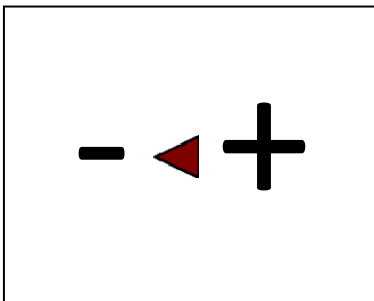

50/50 | HALF & HALF

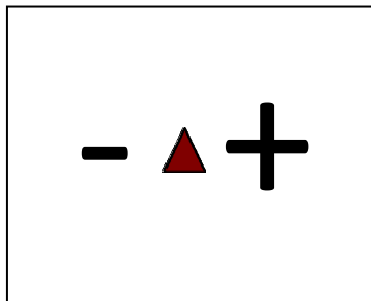

ALL AIR | BLUE FLAME

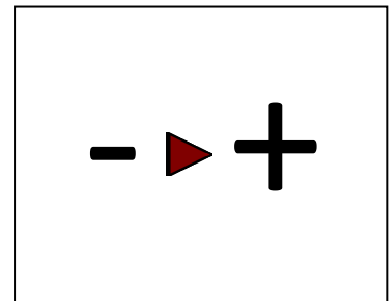

PLEASE NOTE: You are looking to have an orange top & a blue bottom to your flame. An all blue flame will be difficult to see, & an all-orange flame will cause severe sooting.