
FLARE FIREPLACES




39"
23"
24"
55 7/8"
18"
2"

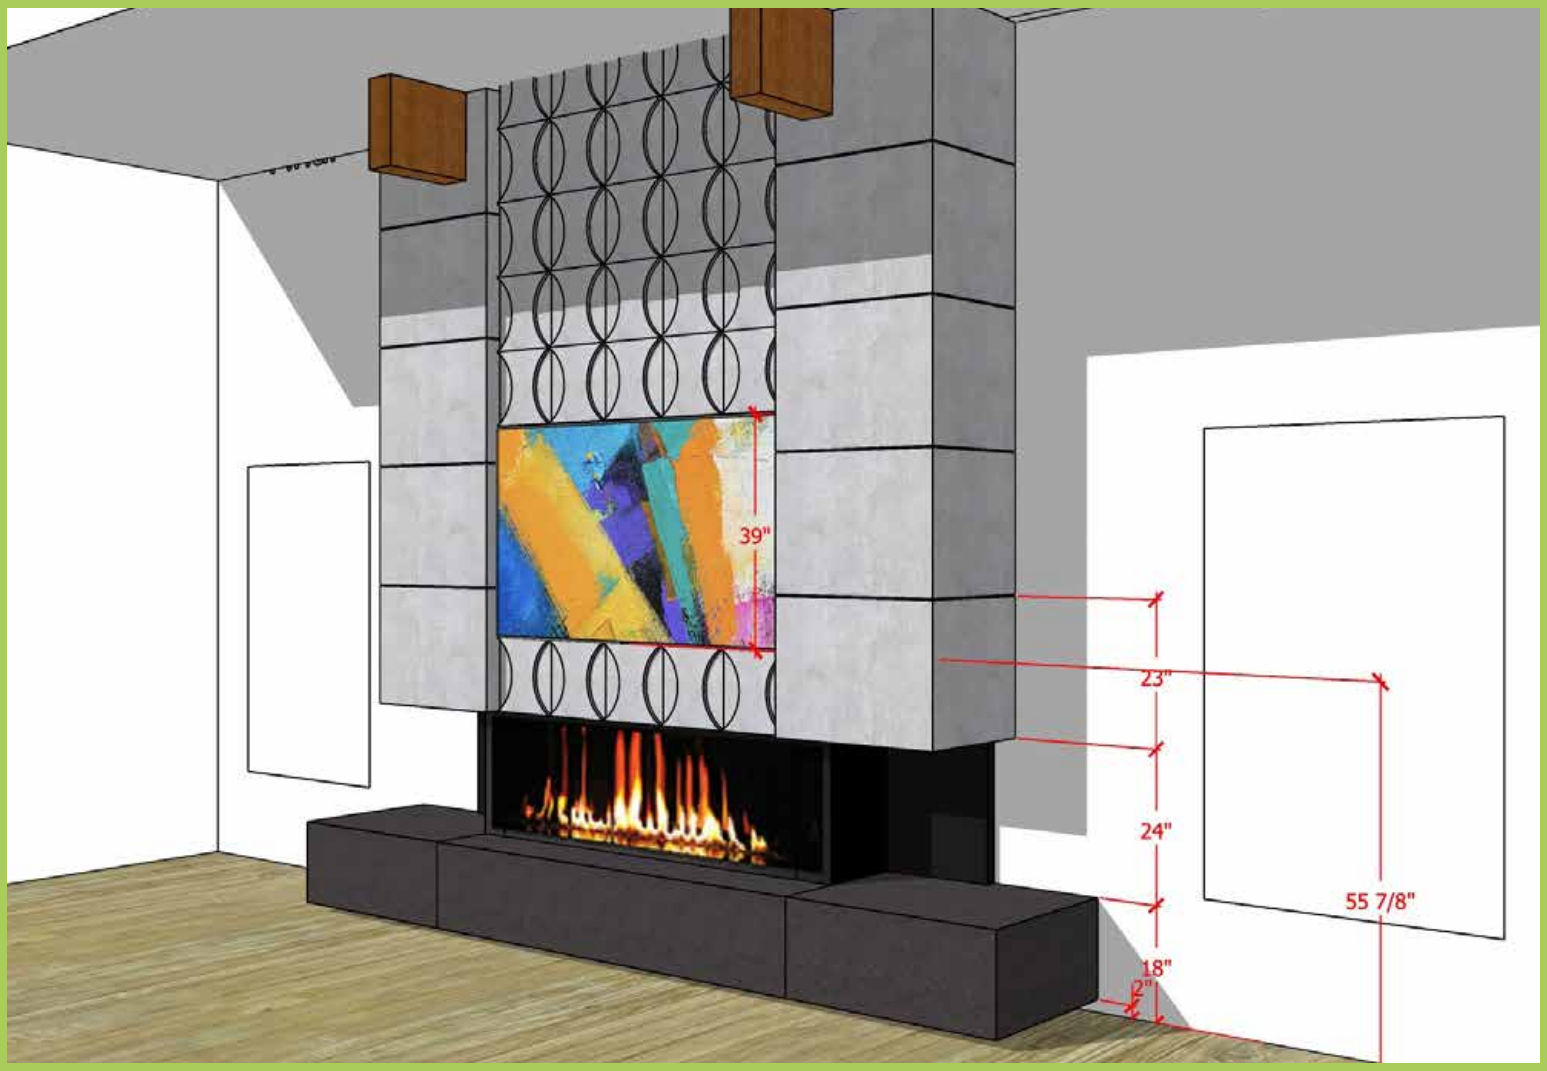

FIND YOUR FLARE

Flare Fireplaces seamlessly blends modern design with functionality and efficiency. If you're in search of a breathtaking focal point or a reliable heating solution for your home or business, Flare is your go-to destination for premium fireplaces that deliver on every front.

Our sleek, frameless, linear, direct-vent fireplaces are crafted to meet the highest standards of quality and safety. With Flare Fireplaces, you'll find installation a breeze and versatility unmatched, offering over 80 models and a wide array of options. Select from 8 distinctive styles, each available in lengths ranging from 30 to 100 inches and with glass heights of 16, 24, or 30 inches to perfectly fit your space. Invest in a Flare Fireplace and enjoy the warmth and elegance it brings for years to come, backed by our 10-year warranty.

CONTENTS

2-3	Key Features
4	Optional Features
5	Home Automation
6	Power Vent
7	Commercial Line
8	Summer Kit
9	Outdoor Kit
10-11	Heat Management
12-13	Summit Burner
14-15	Decorative Media
16-17	Front Facing
18-19	See Through
20-21	Right Corner
22-23	Left Corner
24-25	Double Corner
26-27	Room Definer
28-29	Passage Front & See Through
30-31	Traditional
32-33	Picture Key

KEY FEATURES

STYLE

CHARACTERISTICS

Six different linear presentations, each from 30-100 inches long. [1] Standard 16-inch glass height, 24-inch High Glass, or 30-inch Extra High Glass option available for all models. Frameless design. Residential and commercial use.



COOL TOUCH

WALL DESIGN

All of our models are designed so surrounding walls stay relatively cool, allowing you to hang a TV or art piece closer to the fireplace with less insulation to save you time, money, and effort.



EASY INSTALL

AND SERVICE

Telescopic Legs let you easily plan and adjust the fireplace height. Easy access to the vent restrictor and air shutter allows quick calibration of flame height & color. Smoke free paint with no burn period.





BURNERS

AND GAS

3D Stainless Steel and Summit burners provide a natural flame presentation, with multi-burner systems that extend flames closer to the edges or add height for taller viewing windows. Features include electronic ignition, a power adapter with battery backup, and compatibility with natural gas or propane.



CERTIFICATES

AND COMPLIANCE

Complying with North American standards[3] as well as state requirements in CA, MA, and NY.

High Efficiency ratings.

Certified for use with DuraVent 3x5, 4x6, or 5x8 direct vents.[4]



QUALITY

AND COMFORT

Compatible with home automation systems.

Advanced programable remote control.

Easy to use wall switch.

Classic Decorative Media included.


10 year warranty.

[3] ANSI Z21.88 – CSA 2.33 Vented Gas Fireplace Heaters.

OPTIONAL FEATURES

COOLED **GLASS**

Cooled external glass serves as a sleek safety barrier while maintaining the same heat output and efficiency. Frameless corners allow a clear view to the flames. Power venting not required. Suitable for residential and commercial use.

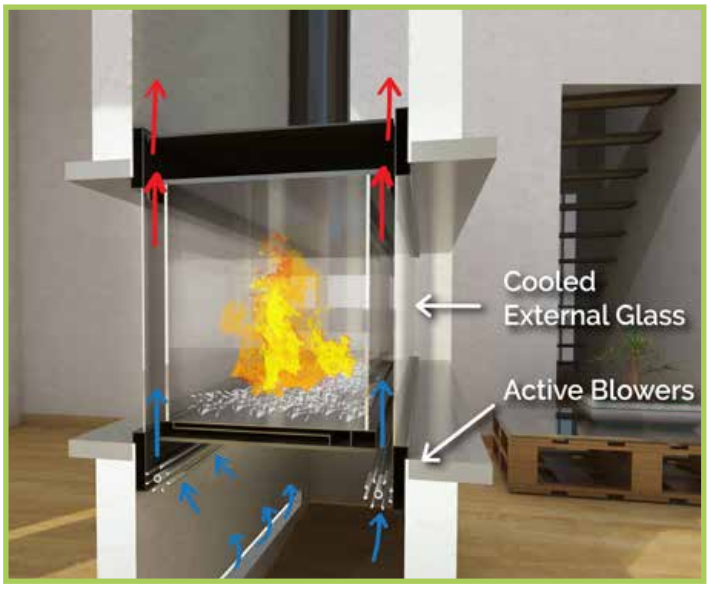

LED **LIGHTING**

Available in a radiant multi-colored option. Remote included.

REFLECTIVE **BACK** AND **SIDES**

Let the flames stand out against a black-mirrored ceramic glass background, adding amazing depth to any unit.



WALL **TIMER**

Simple wall-mounted timer. With the flexibility for mounting up to 200' away.


CUSTOM **UNITS**

Custom lengths and heights for special projects. Contact for more details and pricing.



HOME AUTOMATION

You can easily connect your Flare Fireplace to a new or existing home automation hub using our "Home Automation Cable", included with every Flare Fireplace. This modern feature allows you to turn your fireplace on and off, and adds a modern twist to the heart of your smart-home.

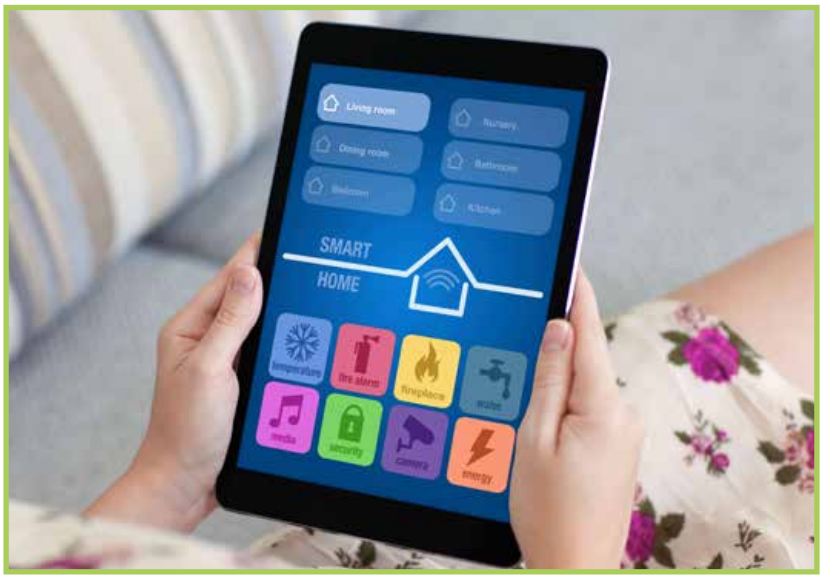



POWER VENT

IN-LINE
SYSTEM

The in-line Power Vent allows vent runs of up to 100 feet. Designed for downward or extremely long horizontal runs. The system uses DuraVent 3x5 vents.





END-OF-LINE
VERTICAL


The End of Line Vertical Power Vent allows vent runs of up to 100 feet. Designed for downward or extremely long horizontal runs. The system uses DuraVent 3x5 vents.

FLUSH END-OF-LINE
HORIZONTAL

The End of Line Horizontal Power Vent sits flush against your external wall. It allows vent runs of up to 100 feet. Designed for downward or extremely long horizontal runs. The system uses DuraVent 3x5 vents.



COMMERCIAL LINE

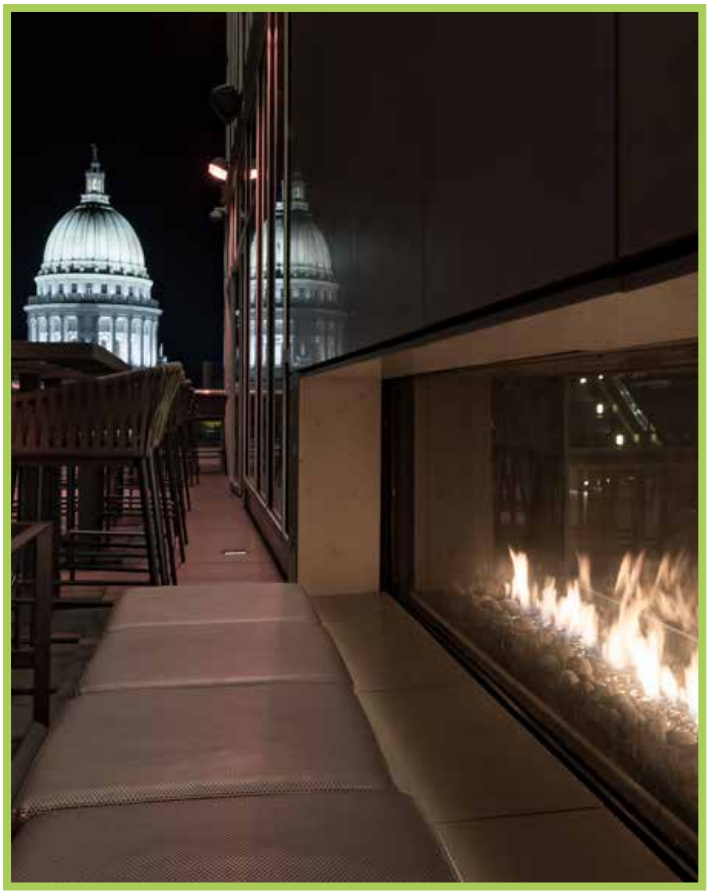

Flare Fireplaces are perfect commercial use whether indoors or out. The taller glass option increases the viewing angle and the Double Glass feature comes standard for extra safety. Also included is a commercial grade gas valve so you can be confident Flare will integrate flawlessly into your restaurant, hotel, or local business.





SUMMER KIT

IN-LINE
SUMMER KIT

The perfect solution for moving heat from your fireplace chase to any outdoor termination point. Using flex pipe you can effectively run the heat your fireplace creates up to 80 feet, terminating on an exterior sidewall, allowing for operation of the fireplace without the heat it produces during the summer months.




FLUSH END-OF-LINE
SUMMER KIT

This secondary option in our Summer Kit lineup opens up even more possibilities for installation across a wider array of projects. By offering an end of line horizontal termination you no longer have to worry about where to place the Summer Kit fan for service. You also reduce the noise level by allowing the installation of the fan to be further away from the fireplace.



OUTDOOR KIT

*The Flare Outdoor Kit provides the freedom to enjoy a Flare Fireplace in your favorite setting. Use a Passage unit as the perfect centerpiece for your relaxing outside patio, or install the See Through Fireplace on an external wall for a unique, multi-purpose window. Our specially designed weather resistant kit comes with the same 10 year warranty as the rest of our line.

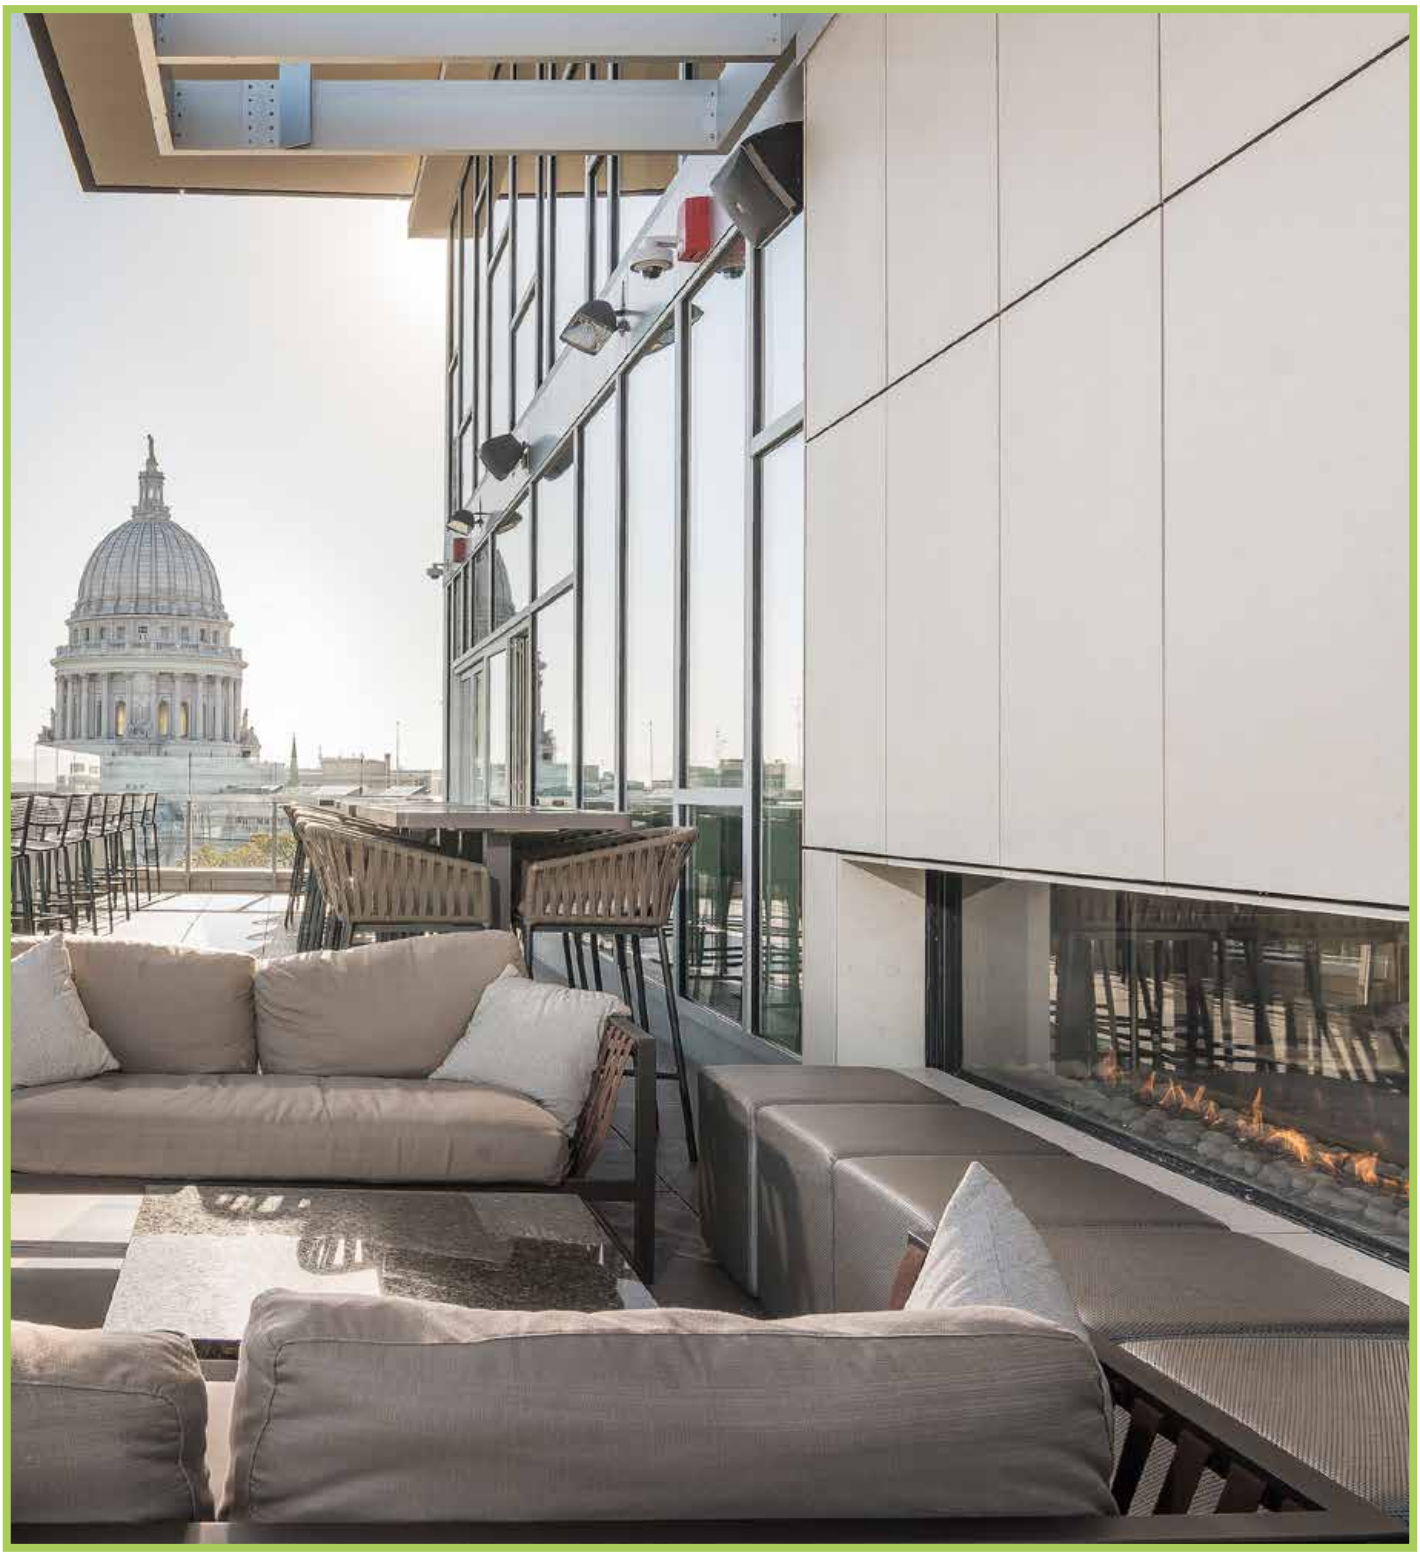

*Available only for See Through and Passage models.

HEAT MANAGEMENT

Every fireplace generates warmth, but how that heat is managed makes all the difference. All of our fireplaces implement the Cool Wall Technology but offer three distinct heat management solutions — Free Flow, Heat Flex Passive, and Heat Flex Active — each designed to enhance comfort while protecting your space and design choices.

FREE FLOW
NATURAL WARMTH, EFFORTLESS COMFORT

With the Free Flow system, warm air naturally circulates back into the room, providing a steady, passive flow of heat. This approach not only maintains a comfortable ambiance but also controls the temperature of the surrounding walls, ensuring they remain cool to the touch. Thanks to this design, you can confidently place a TV or artwork just 12 inches above the glass opening, regardless of the fireplace size, style, or safety barrier. Free Flow offers a seamless way to enjoy the warmth of your fireplace while preserving your space's aesthetics.

PASSIVE - HEAT FLEX
DESIGNED FOR WARMTH, BUILT FOR SIMPLICITY

For those seeking a more controlled approach, the Heat Flex Passive system channels heat away from the fireplace using ducts connected to a standardized release. This system safely disperses warmth while allowing for uncovered wood studs around the fireplace and the abiity to mount a TV or art piece 12" from the glass opening, providing flexibility in design without compromising safety. It's an ideal option for homeowners who want to manage heat effectively without the need for complex framing solutions.

ACTIVE - HEAT FLEX
REMOVE THE RELEASE

The most advanced heat management solution, Active Heat Flex, takes control to the next level by channeling heat through ducts to a monitored fan system that vents excess heat outside. This eliminates the need for a heat release while allowing you to mount a TV or art piece as close as 12" to the fireplace opening, giving you complete freedom to frame around your fireplace with uncovered wood studs. By actively managing heat output, Active Heat Flex ensures a balanced, comfortable environment while protecting nearby surfaces and electronics from excess heat.



FREE FLOW

PASSIVE - STANDARD

Free Flow can be used to allow warm air to passively flow back into the room. Controlling the temperature of the surrounding walls, keeping them cool, and allowing a TV or art piece to hang 12" from the glass opening regardless of fireplace size, style, or safety barrier.



HEAT FLEX

PASSIVE - OPTIONAL

Passive Heat Flex channels the heat created by your fireplace through ducts that connect to a standardized release. This system allows you to frame around the unit using uncovered wood studs.



HEAT FLEX

ACTIVE - OPTIONAL

Active Heat Flex channels the heat generated by your fireplace through ducts to a monitored fan system, eliminating the need for a heat release, and allowing you to frame around your fireplace with uncovered wood studs.

SUMMIT BURNER

Introducing our new Summit Burner, an optional upgrade available for all our indoor fireplace models. Designed to enhance the visual appeal of fireplaces with taller viewing windows, the Summit Burner elevates the flame into the vertical space using an advanced Flame Out Of Log burner. This versatile system runs on natural gas or liquid propane, supports dual-side burning for See-Through and Corner styles, and can even be retrofitted into existing units equipped with the SIT ProFlame valve system. Elevate your fireplace experience with the Summit Burner upgrade today.

LINEAR SUMMIT
LIFT YOUR FLAME HIGHER

The Summit burner system is a stunning in-log burner designed to enhance the look of any linear fireplace. Featuring realistic logs, it elevates the flames into the vertical space of the viewing window, creating a captivating, dynamic display that adds significant visual impact.



TRADITIONAL SUMMIT
ELEVATE TRADITIONAL STYLE

The elevated log design in a frameless traditional fireplace brings a bold, dynamic flame presentation to a classic setting. Using beautifully crafted wood logs, this setup creates a natural, stacked-wood appearance while allowing the flames to rise higher, adding warmth, depth, and an inviting ambiance to any space.









DECORATIVE MEDIA




Reflective Silver Fireglass




Reflective Bronze Fireglass



Reflective Ice Fireglass

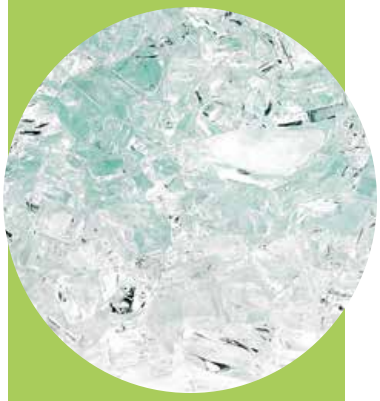

Clear Fireglass

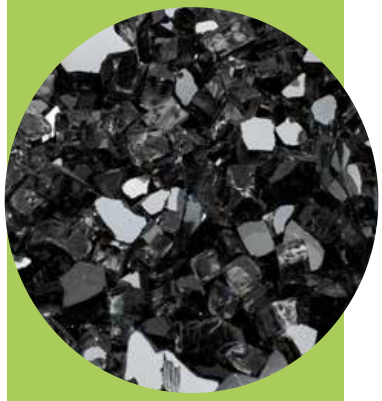

Black Fireglass



Gold Fireglass



Chestnut Fireglass



Zircon Black Diamonds



Raindrop Diamonds



White Ceramic Pebbles



Black Ceramic Pebbles



Mixed-size Earth Pebbles

Not all available options shown



Cottage White Stones




Premium Black Stones



Mixed Stone Balls



Cape Grey Stone Balls Mix

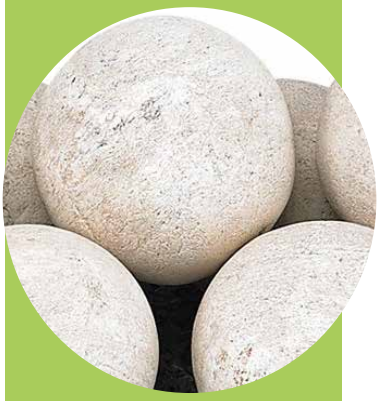

White Stone Balls



Black Stone Balls



Tan Embers



Black Embers



Ceramic Logs



Ceramic Branches



Birchwood



Driftwood

Not all available options shown

FRONT FACING




Ideal for modern and contemporary rooms, replacing an existing fireplace or as a new installation. Available in three different glass heights and widths ranging from 30 to 100 inches, giving a sleek linear look. Indoor & outdoor options available.



SPECIFICATIONS

Model	BTU/hr (max)	BTU/hr (min)	Efficiency
Flare-FF-30-R/H	34,000	18,500	79.5 %
Flare-FF-45-R/H/EH	36,800	22,000	79.2 %
Flare-FF-50-R/H/EH	47,000	22,750	79.3 %
Flare-FF-60-R/H/EH	50,000	28,000	79.2 %
Flare-FF-70-R/H/EH	52,200	28,000	79.8 %
Flare-FF-80-R/H/EH	55,700	31,000	79.7 %
Flare-FF-100-R/H/EH	60,000	32,500	80.3 %

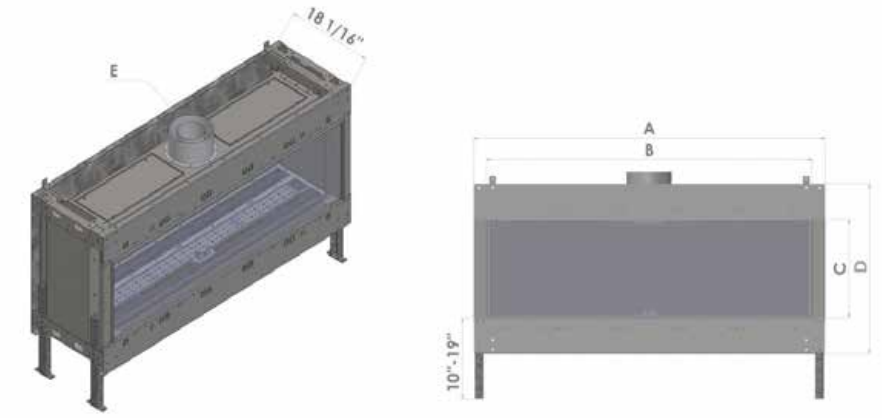

A: Full Width B: Opening Width C: Opening Height
D: Fireplace Height, Minus Legs E: Vent Pipe Diameter

Model	A	B	C	D	E
Flare-FF-30-R	32 10/16	28 4/16	16	28	4x6
Flare-FF-45-R	45 9/16	41 4/16	16	28	4x6
Flare-FF-50-R	52 5/16	47 15/16	16	28	5x8
Flare-FF-60-R	62 2/16	57 13/16	16	28	5x8
Flare-FF-70-R	72 3/16	67 10/16	16	28	5x8
Flare-FF-80-R	84 9/16	80 4/16	16	28	5x8
Flare-FF-100-R	101 8/16	97 3/16	16	28	5x8
Flare-FF-30-H	32 10/16	28 4/16	24	35 14/16	4x6
Flare-FF-45-H	45 9/16	41 4/16	24	35 14/16	4x6
Flare-FF-50-H	52 5/16	47 15/16	24	35 14/16	5x8
Flare-FF-60-H	62 2/16	57 13/16	24	35 14/16	5x8
Flare-FF-70-H	72 3/16	67 10/16	24	35 14/16	5x8
Flare-FF-80-H	84 9/16	80 4/16	24	35 14/16	5x8
Flare-FF-100-H	101 8/16	97 3/16	24	35 14/16	5x8
Flare-FF-45-EH	45 9/16	41 4/16	30	42 1/8	4x6
Flare-FF-50-EH	52 5/16	47 15/16	30	42 1/8	5x8
Flare-FF-60-EH	62 2/16	57 13/16	30	42 1/8	5x8
Flare-FF-70-EH	72 3/16	67 10/16	30	42 1/8	5x8
Flare-FF-80-EH	84 9/16	80 4/16	30	42 1/8	5x8
Flare-FF-100-EH	101 8/16	97 3/16	30	42 1/8	5x8

SEE THROUGH


Stylish, minimalist design that allows fireplace viewing from two adjacent rooms. Available in three different glass heights: 16", 24", and 30". Available for indoor and outdoor, perfect for mounting a TV above.





SPECIFICATIONS

Model	BTU/hr (max)	BTU/hr (min)	Efficiency
Flare-ST-30-R/H	34,000	18,500	79.5 %
Flare-ST-45-R/H/EH	36,800	22,000	79.2 %
Flare-ST-50-R/H/EH	47,000	22,750	79.9 %
Flare-ST-60-R/H/EH	50,000	28,000	79.6 %
Flare-ST-70-R/H/EH	52,200	28,000	79.4 %
Flare-ST-80-R/H/EH	55,700	31,000	79.6 %
Flare-ST-100-R/H/EH	60,000	32,500	80.1 %

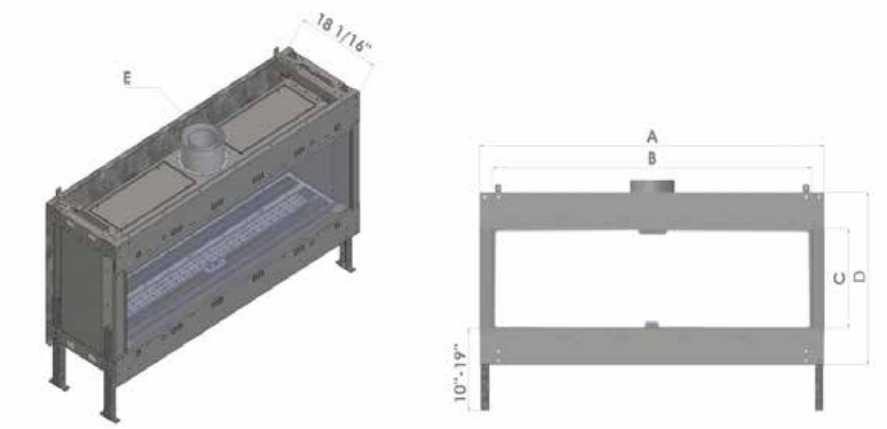

A: Full Width B: Opening Width C: Opening Height
D: Fireplace Height, Minus Legs E: Vent Pipe Diameter

Model	A	B	C	D	E
Flare-ST-30-R	32 12/16	28 4/16	16	28	4x6
Flare-ST-45-R	45 13/16	41 4/16	16	28	4x6
Flare-ST-50-R	52 8/16	47 5/16	16	28	5x8
Flare-ST-60-R	62 5/16	57 13/16	16	28	5x8
Flare-ST-70-R	72 3/16	67 10/16	16	28	5x8
Flare-ST-80-R	84 12/16	80 4/16	16	28	5x8
Flare-ST-100-R	101 11/16	97 3/16	16	28	5x8
Flare-ST-30-H	32 13/16	28 4/16	24	35 14/16	4x6
Flare-ST-45-H	45 13/16	41 4/16	24	35 14/16	4x6
Flare-ST-50-H	52 8/16	47 5/16	24	35 14/16	5x8
Flare-ST-60-H	62 5/16	57 13/16	24	35 14/16	5x8
Flare-ST-70-H	72 3/16	67 10/16	24	35 14/16	5x8
Flare-ST-80-H	84 12/16	80 4/16	24	35 14/16	5x8
Flare-ST-100-H	101 11/16	97 3/16	24	35 14/16	5x8
Flare-ST-45-EH	45 13/16	41 4/16	30	42 1/8	5x8
Flare-ST-50-EH	52 8/16	47 5/16	30	42 1/8	5x8
Flare-ST-60-EH	62 5/16	57 13/16	30	42 1/8	5x8
Flare-ST-70-EH	72 3/16	67 10/16	30	42 1/8	5x8
Flare-ST-80-EH	84 12/16	80 4/16	30	42 1/8	5x8
Flare-ST-100-EH	101 11/16	97 3/16	30	42 1/8	5x8

RIGHT CORNER


The right corner fireplace allows more viewing angles with its innovative design. The frameless glass corner attracts the eye, making it the center of attention. A luxurious fireplace experience, clean design, superior build quality and features.





SPECIFICATIONS

Model	BTU/hr (max)	BTU/hr (min)	Efficiency
Flare-RC-30-H	34,000	18,500	79.4 %
Flare-RC-45-R/H/EH	36,800	22,000	79.7 %
Flare-RC-50-R/H/EH	47,000	22,750	79.8 %
Flare-RC-60-R/H/EH	50,000	28,000	79.8 %
Flare-RC-70-R/H/EH	52,200	28,000	79.9 %
Flare-RC-80-R/H/EH	55,700	31,000	80.2 %
Flare-RC-100-R/H/EH	60,000	32,500	80.5 %

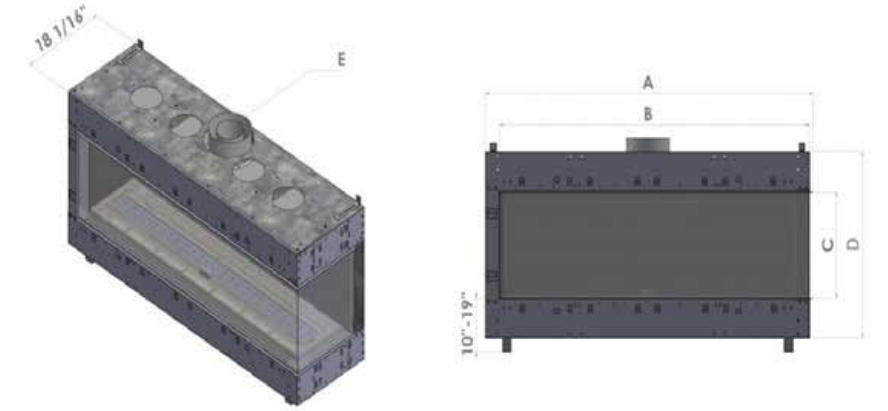


A: Full Width B: Opening Width C: Opening Height
D: Fireplace Height, Minus Legs E: Vent Pipe Diameter

Model	A	B	C	D	E
Flare-RC-45-R	43 9/16	41 1/16	16	28	4x6
Flare-RC-50-R	50 4/16	47 13/16	16	28	5x8
Flare-RC-60-R	60 1/16	57 10/16	16	28	5x8
Flare-RC-70-R	69 15/16	67 8/16	16	28	5x8
Flare-RC-80-R	82 8/16	80 1/16	16	28	5x8
Flare-RC-100-R	99 7/16	97	16	28	5x8
*Flare-RC-30-H	30 9/16	28 8/16	24	35 14/16	4x6
Flare-RC-45-H	43 9/16	41 1/16	24	35 14/16	4x6
Flare-RC-50-H	50 4/16	47 13/16	24	35 14/16	5x8
Flare-RC-60-H	60 1/16	57 10/16	24	35 14/16	5x8
Flare-RC-70-H	69 15/16	67 8/16	24	35 14/16	5x8
Flare-RC-80-H	82 8/16	80 1/16	24	35 14/16	5x8
Flare-RC-100-H	99 7/16	97	24	35 14/16	5x8
Flare-RC-45-EH	43 9/16	41 1/16	30	42 3/16	5x8
Flare-RC-50-EH	50 4/16	47 13/16	30	42 3/16	5x8
Flare-RC-60-EH	60 1/16	57 10/16	30	42 3/16	5x8
Flare-RC-70-EH	69 15/16	67 8/16	30	42 3/16	5x8
Flare-RC-80-EH	82 8/16	80 1/16	30	42 3/16	5x8
Flare-RC-100-EH	99 7/16	97	30	42 3/16	5x8

*Flare-RC-30-H is only available in 24” glass height

LEFT CORNER


The left corner fireplace allows more viewing angles with its innovative design. The frameless glass corner attracts the eye, making it the center of attention. A luxurious fireplace experience, clean design, superior build quality and features.

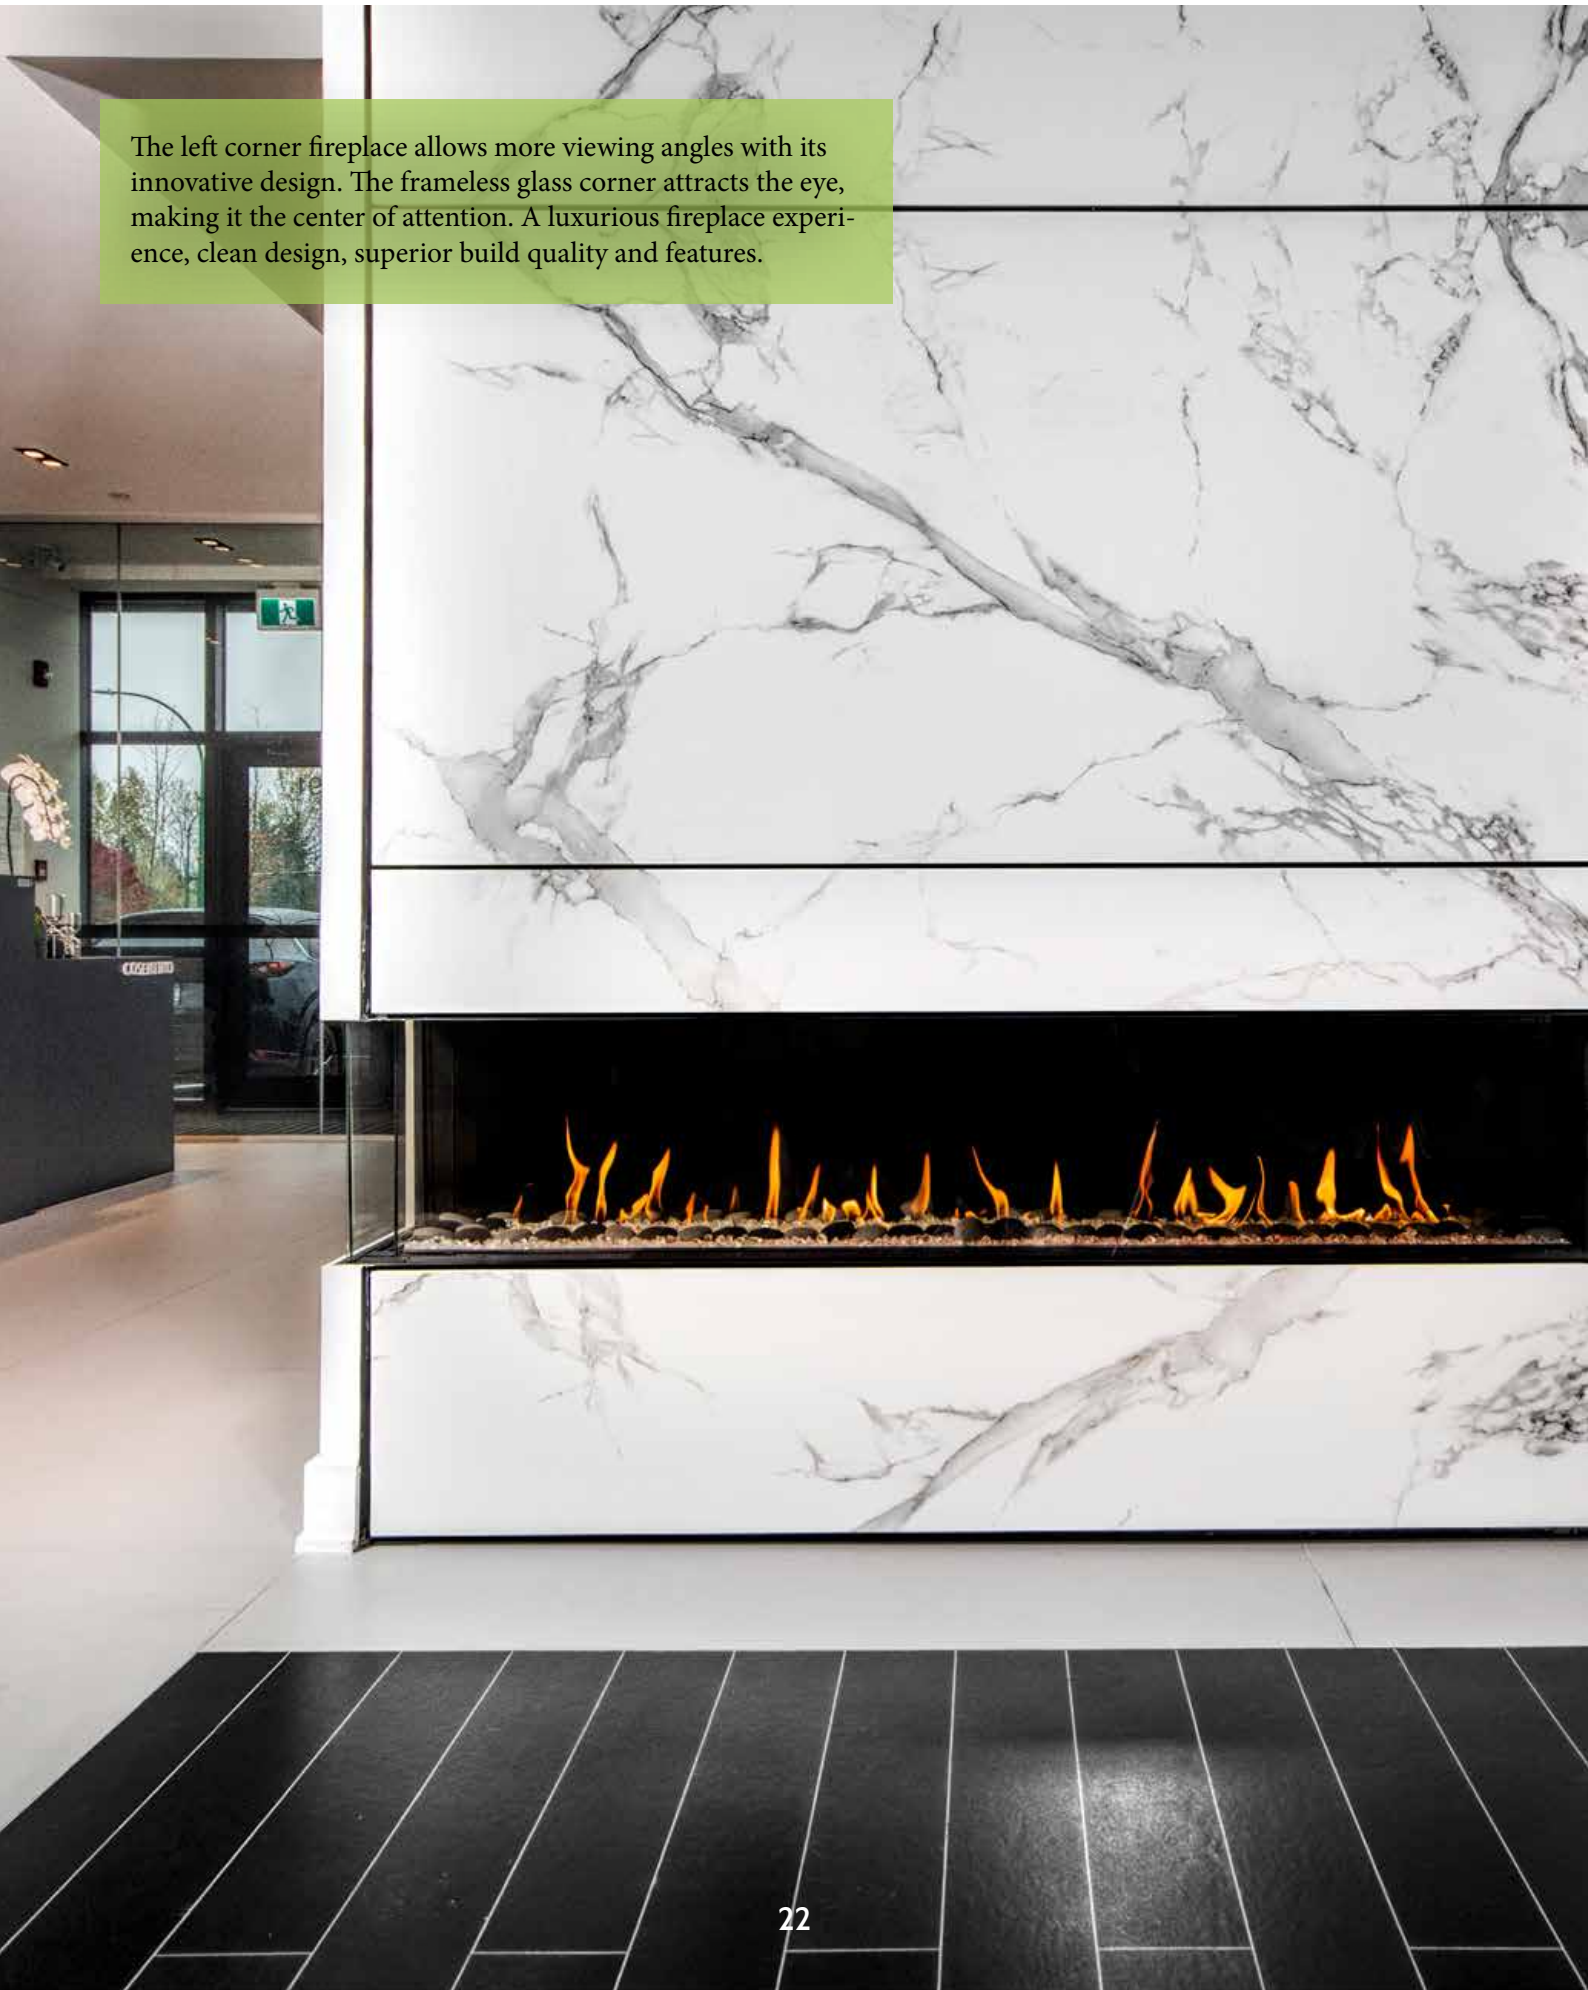



SPECIFICATIONS

Model	BTU/hr (max)	BTU/hr (min)	Efficiency
Flare-LC-30-H	34,000	18,500	79.4 %
Flare-LC-45-R/H/EH	36,800	22,000	79.7 %
Flare-LC-50-R/H/EH	47,000	22,750	79.8 %
Flare-LC-60-R/H/EH	50,000	28,000	79.8 %
Flare-LC-70-R/H/EH	52,200	28,000	79.9 %
Flare-LC-80-R/H/EH	55,700	31,000	80.2 %
Flare-LC-100-R/H/EH	60,000	32,500	80.5 %

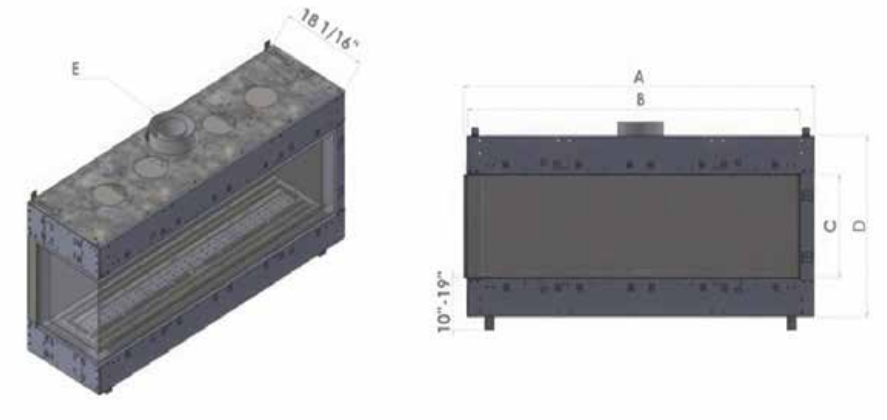

A: Full Width B: Opening Width C: Opening Height
D: Fireplace Height, Minus Legs E: Vent Pipe Diameter

Model	A	B	C	D	E
Flare-LC-45-R	43 9/16	41 1/16	16	28	4x6
Flare-LC-50-R	50 4/16	47 13/16	16	28	5x8
Flare-LC-60-R	60 1/16	57 10/16	16	28	5x8
Flare-LC-70-R	69 15/16	67 8/16	16	28	5x8
Flare-LC-80-R	82 8/16	80 1/16	16	28	5x8
Flare-LC-100-R	99 7/16	97	16	28	5x8
*Flare-LC-30-H	30 9/16	28 8/16	24	35 14/16	4x6
Flare-LC-45-H	43 9/16	41 1/16	24	35 14/16	4x6
Flare-LC-50-H	50 4/16	47 13/16	24	35 14/16	5x8
Flare-LC-60-H	60 1/16	57 10/16	24	35 14/16	5x8
Flare-LC-70-H	69 15/16	67 8/16	24	35 14/16	5x8
Flare-LC-80-H	82 8/16	80 1/16	24	35 14/16	5x8
Flare-LC-100-H	99 7/16	97	24	35 14/16	5x8
Flare-LC-45-EH	43 9/16	41 1/16	30	42 3/16	5x8
Flare-LC-50-EH	50 4/16	47 13/16	30	42 3/16	5x8
Flare-LC-60-EH	60 1/16	57 10/16	30	42 3/16	5x8
Flare-LC-70-EH	69 15/16	67 8/16	30	42 3/16	5x8
Flare-LC-80-EH	82 8/16	80 1/16	30	42 3/16	5x8
Flare-LC-100-EH	99 7/16	97	30	42 3/16	5x8


*Flare-LC-30-H is only available in 24" glass height

DOUBLE CORNER

An intriguing three-sided view of the fireplace makes the Flare Double Corner exceptionally stylish and practical. The fireplace corners are clean and smooth thanks to Flare's glass to glass technology.




SPECIFICATIONS

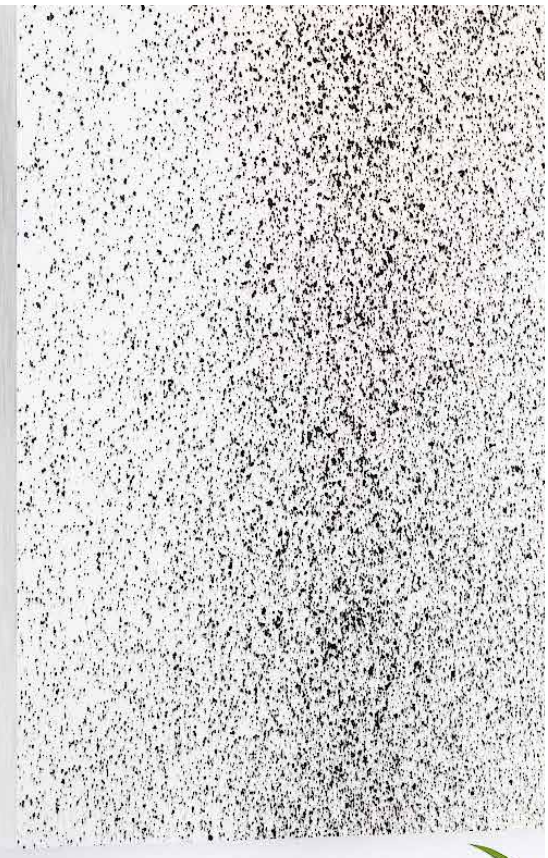



Model	BTU/hr (max)	BTU/hr (min)	Efficiency
Flare-DC-30-H	34,000	18,500	79.4 %
Flare-DC-45-R/H/EH	36,800	22,000	79.7 %
Flare-DC-50-R/H/EH	47,000	22,750	79.8 %
Flare-DC-60-R/H/EH	50,000	28,000	79.8 %
Flare-DC-70-R/H/EH	52,200	28,000	79.9 %
Flare-DC-80-R/H/EH	55,700	31,000	80.2 %
Flare-DC-100-R/H/EH	60,000	32,500	80.5 %

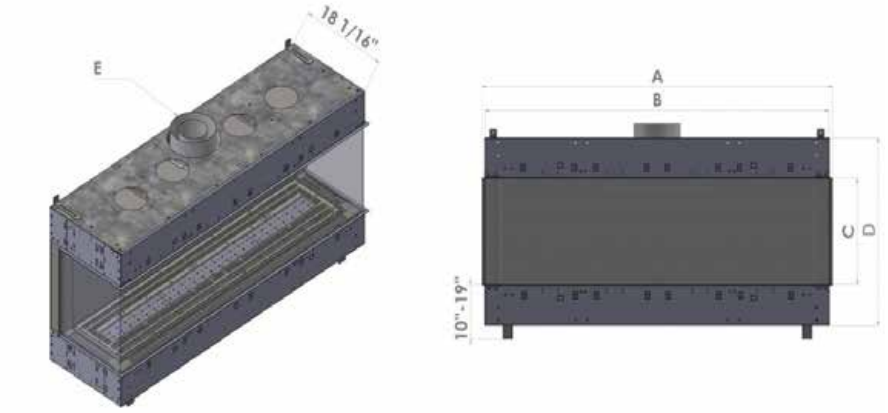


A: Full Width B: Opening Width C: Opening Height
D: Fireplace Height, Minus Legs E: Vent Pipe Diameter

Model	A	B	C	D	E
Flare-DC-45-R	43 9/16	43 7/16	16	28	4x6
Flare-DC-50-R	50 4/16	50 2/16	16	28	5x8
Flare-DC-60-R	60 2/16	59 15/16	16	28	5x8
Flare-DC-70-R	69 15/16	69 13/16	16	28	5x8
Flare-DC-80-R	82 9/16	82 6/16	16	28	5x8
Flare-DC-100-R	99 8/16	99 5/16	16	28	5x8
*Flare-DC-30-H	30 9/16	30 7/16	24	35 14/16	4x6
Flare-DC-45-H	43 9/16	43 7/16	24	35 14/16	4x6
Flare-DC-50-H	50 4/16	50 2/16	24	35 14/16	5x8
Flare-DC-60-H	60 2/16	59 15/16	24	35 14/16	5x8
Flare-DC-70-H	69 15/16	69 13/16	24	35 14/16	5x8
Flare-DC-80-H	82 9/16	82 6/16	24	35 14/16	5x8
Flare-DC-100-H	99 8/16	99 5/16	24	35 14/16	5x8
Flare-DC-45-EH	43 9/16	43 7/16	30	42 3/16	5x8
Flare-DC-50-EH	50 4/16	50 2/16	30	42 3/16	5x8
Flare-DC-60-EH	60 2/16	59 15/16	30	42 3/16	5x8
Flare-DC-70-EH	69 15/16	69 13/16	30	42 3/16	5x8
Flare-DC-80-EH	82 9/16	82 6/16	30	42 3/16	5x8
Flare-DC-100-EH	99 8/16	99 5/16	30	42 3/16	5x8

*Flare-DC-30-H is only available in 24” glass height

ROOM DEFINER


A stunning peninsula design with a side vent, intended as a room divider. The three glass sides creates an impressive and magnificent way to give character to any living area. The design possibilities are endless.

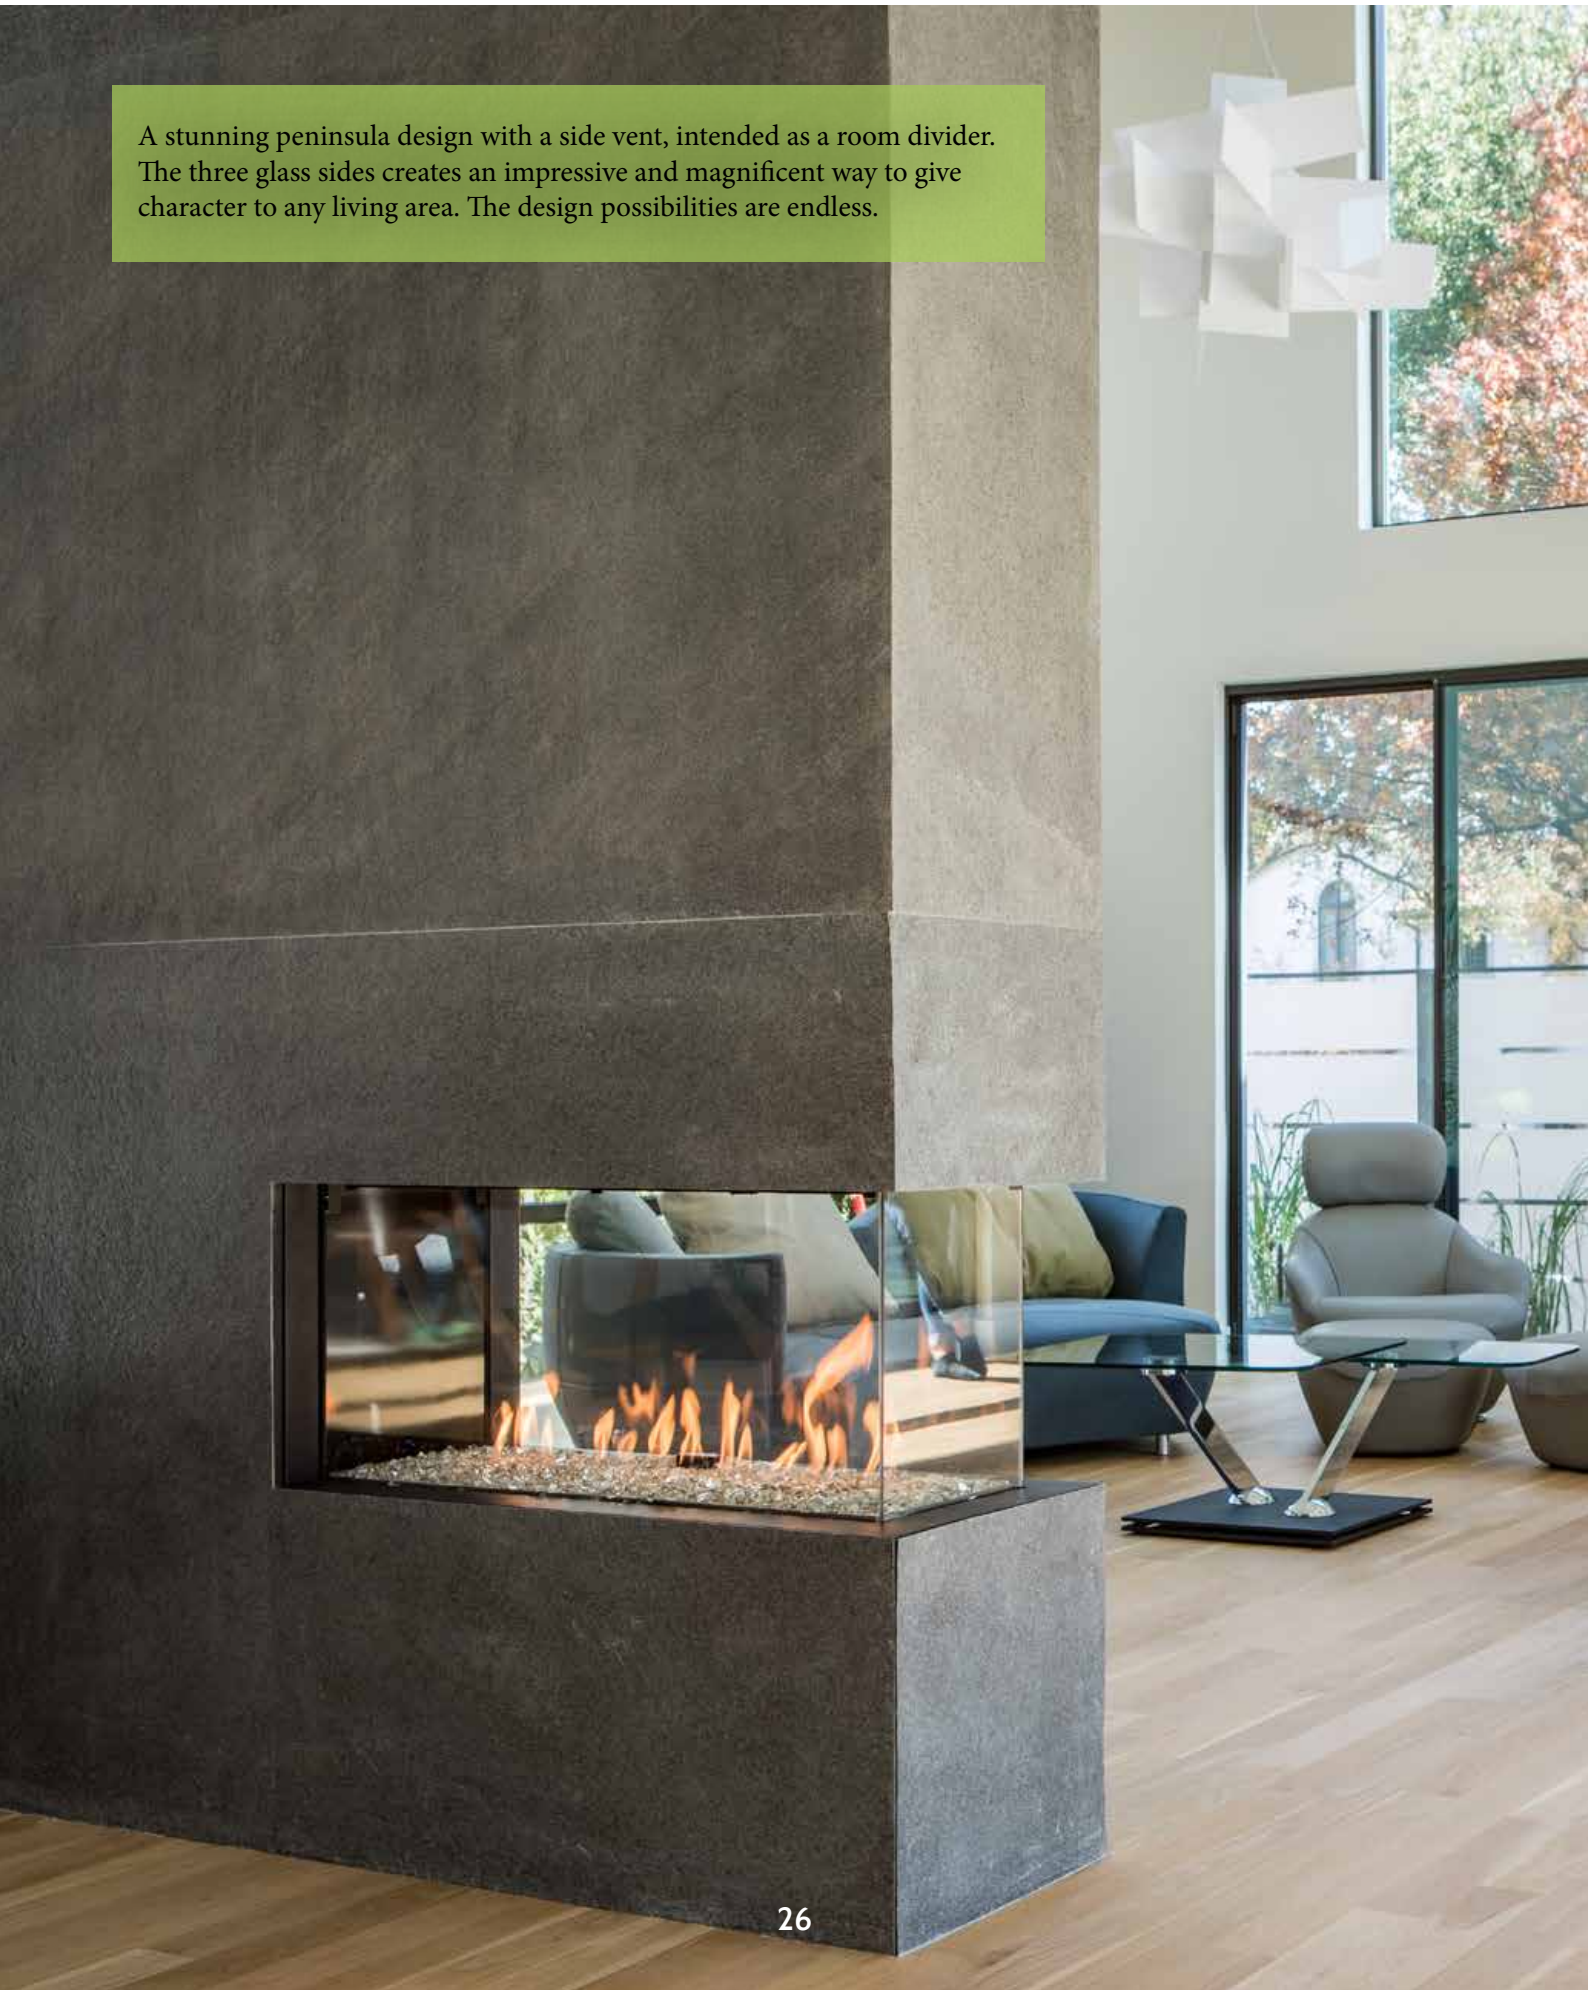



SPECIFICATIONS

Model	BTU/hr (max)	BTU/hr (min)	Efficiency
Flare-RD-45-R/H/EH	36,800	22,000	79.4 %
Flare-RD-50-R/H/EH	47,000	22,750	79.5
Flare-RD-60-R/H/EH	50,000	28,000	79.5
Flare-RD-70-R/H/EH	52,200	28,000	79.8
Flare-RD-80-R/H/EH	55,700	31,000	80.1
Flare-RD-100-R/H/EH	60,000	32,500	80.4

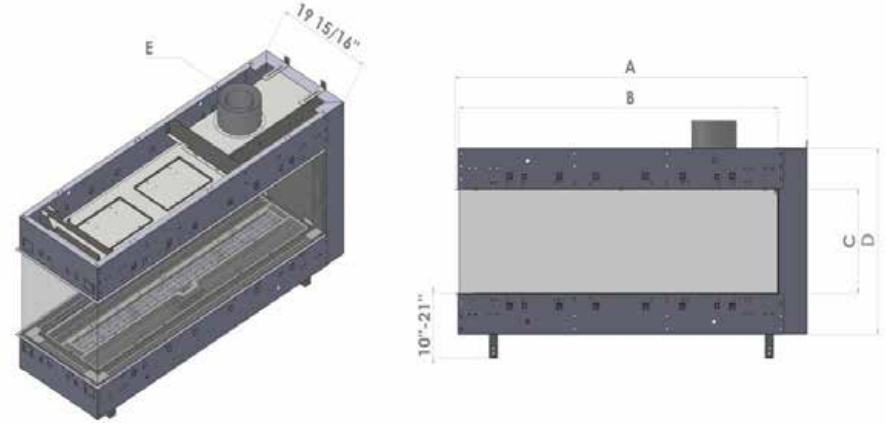


A: Full Width B: Opening Width C: Opening Height
D: Fireplace Height, Minus Legs E: Vent Pipe Diameter

Model	A	B	C	D	E
Flare-RD-45-R	46 15/16	41	16	28 12/16	5x8
Flare-RD-50-R	53	47 11/16	16	28 12/16	5x8
Flare-RD-60-R	62 13/16	57 9/16	16	28 12/16	5x8
Flare-RD-70-R	72 11/16	67 6/16	16	28 12/16	5x8
Flare-RD-80-R	85 4/16	80	16	28 12/16	5x8
Flare-RD-100-R	102 3/16	96 15/16	16	28 12/16	5x8
Flare-RD-45-H	46 15/16	41	24	36 10/16	5x8
Flare-RD-50-H	53	47 11/16	24	36 10/16	5x8
Flare-RD-60-H	62 13/16	57 9/16	24	36 10/16	5x8
Flare-RD-70-H	72 11/16	67 6/16	24	36 10/16	5x8
Flare-RD-80-H	85 4/16	80	24	36 10/16	5x8
Flare-RD-100-H	102 3/16	96 15/16	24	36 10/16	5x8
Flare-RD-45-EH	46 15/16	41	30	42 7/8	5x8
Flare-RD-50-EH	53	47 11/16	30	42 7/8	5x8
Flare-RD-60-EH	62 13/16	57 9/16	30	42 7/8	5x8
Flare-RD-70-EH	72 11/16	67 6/16	30	42 7/8	5x8
Flare-RD-80-EH	85 4/16	80	30	42 7/8	5x8
Flare-RD-100-EH	102 3/16	96 15/16	30	42 7/8	5x8

PASSAGE FRONT & SEE TH

Flare's Passage Front and See-Through fireplace offers a vertical design, intended to offer a modern twist on the linear design Flare is known for. The 60" tall glass face creates an impressive visual experience, designed to give a new perspective on what a modern fireplace can be.



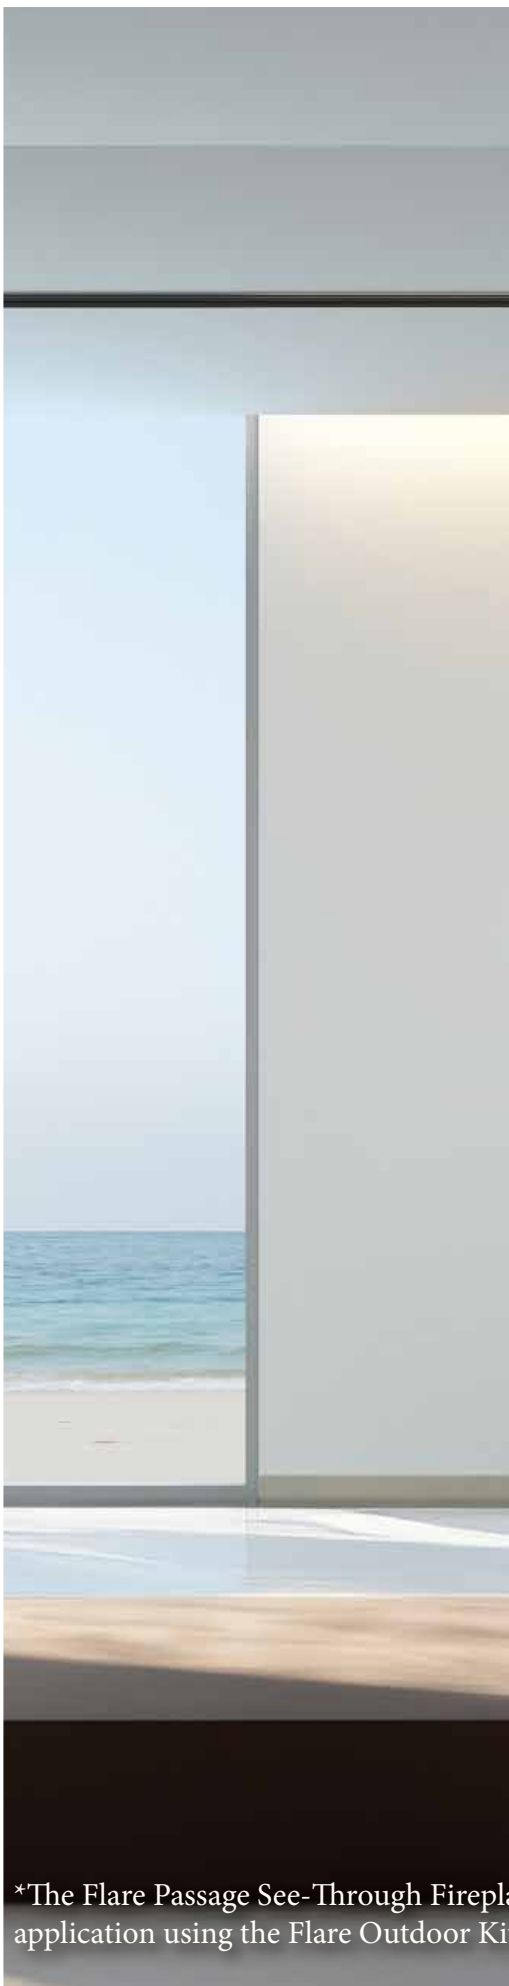

*The Flare Passage See-Through Firepla
application using the Flare Outdoor Ki


HROUGH



ace can be ordered as an indoor/outdoor
t.

SPECIFICATIONS

Model	BTU/hr (max)	BTU/hr (min)	Efficiency
PASS-ST-30-EH	34,000	26,200	80.4 %
PAS-FF-30-EH	34,000	26,200	80.4 %

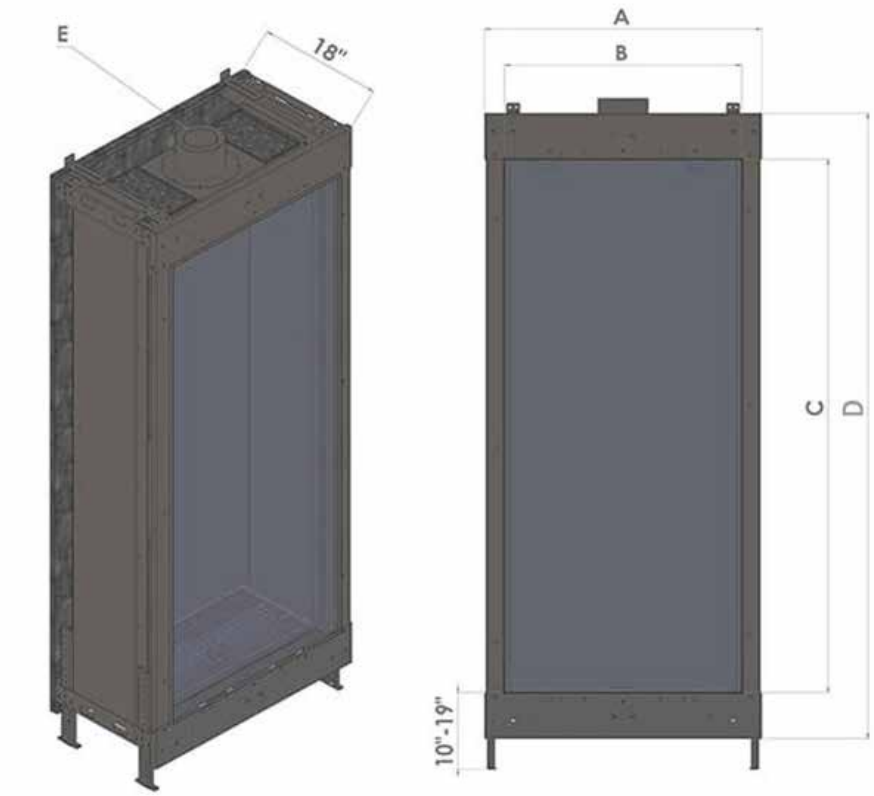

A: Full Width B: Opening Width C: Opening Height
D: Fireplace Height, Minus Legs E: Vent Pipe Diameter

Model	A	B	C	D	E
PASS-FF-30-EH	30	28	60	82	5x8
PASS-ST-30-EH	30	28	60	82	5x8

TRADITIONAL


Our traditional direct vent fireplace with a modern look is the perfect addition to any home or business. With a sleek and contemporary design, it will seamlessly blend into any décor while providing a warm and cozy atmosphere. The direct vent system ensures safe and efficient operation, while the realistic flames and stone background create an inviting ambiance that will make you never want to leave the comfort of your own home.





SPECIFICATIONS

Model	BTU/hr (max)	BTU/hr (min)	Efficiency
DV-TRA-42	37,000	28,000	80
DV-TRA-46	37,000	28,000	80

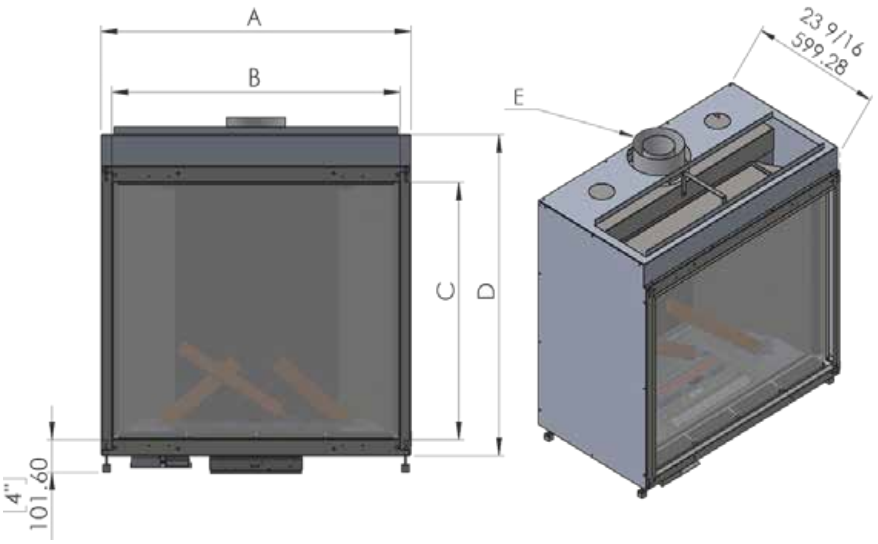

A: Full Width B: Opening Width C: Opening Height
D: Fireplace Height, Minus Legs E: Vent Pipe Diameter

Model	A	B	C	D	E
DV-TRA-42	42 1/4	38 11/16	32 1/16	41 3/8	5x8
DV-TRA-46	46	42 7/16	36	45 5/16	5x8



PICTURE KEY

Cover
Front Facing 60
Inside Cover
Double Corner 60
Page 2
Room Definer 60
Double Corner 80
Room Definer 45 High
Page 3
Left Corner 100
Front Facing 60
Page 4
Double Corner 70
Page 5
Front Facing 100
Page 7
Indoor-Outdoor 100 High
Page 9
Indoor-Outdoor 100 High
Page 11
Front Facing 60 High
Front Facing 60
Page 13
Front Facing 80
Traditional 46
Page 16
Front Facing 80 High
Page 18
See Through 100 High
Page 20
Left Corner 50
Page 22
Left Corner 100
Page 24
Double Corner 50
Page 26
Room Definer 50 High
Page 28
Passage Front & See Through
Page 30
Traditional 46
Inner Back Cover
Room Definer 60 Extra High
Back Cover
Room Definer 60 Extra High





FLARE FIREPLACES

Frameless Is More

Flare Fireplaces LLC
890 N. Dorothy Dr. Suite 900
Richardson, TX 75081

Phone/ Fax: 1-866-639-1590

flarefireplaces.com | Version 8.3

CADdetails

SCAN FOR CONTINUOUS EDUCATION CREDIT